
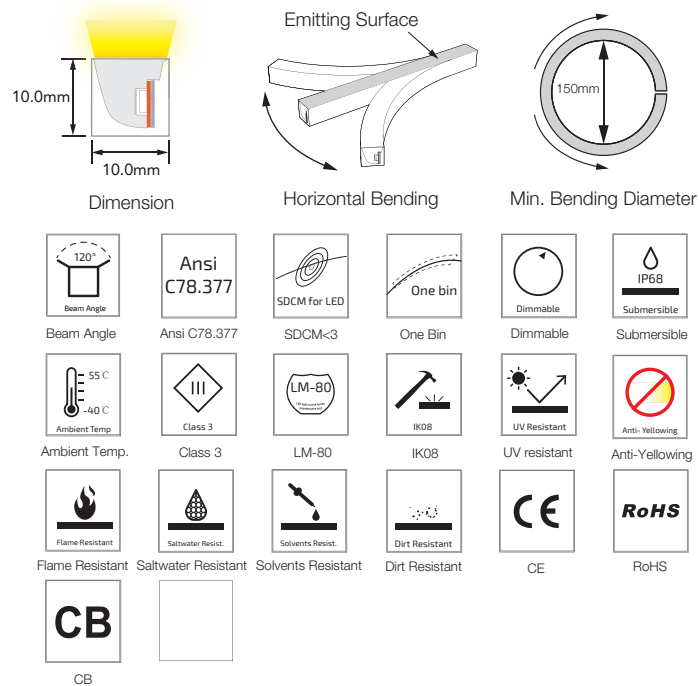


SF08 Mono Color Silicone LED Linear Flex

SF08-24V-2835-120-2200K-6500K



Specification

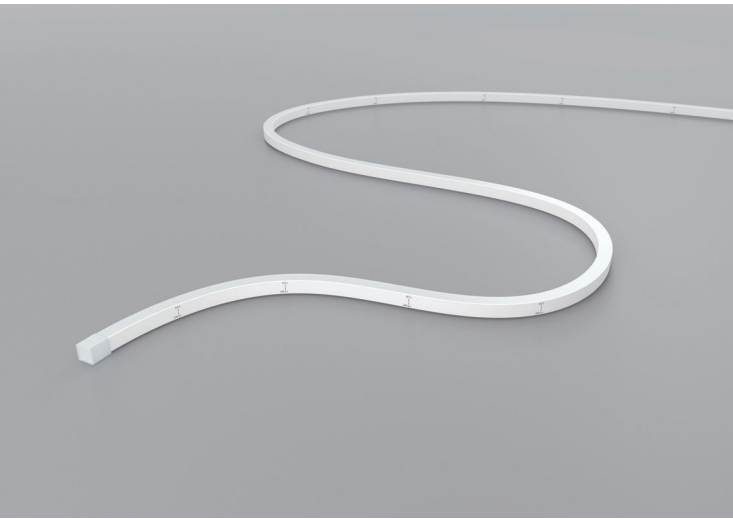

Technical Parameters


Electrical		Optional Color		Lumen Output	
Input Voltage	24V DC				
Power Consumption	10W/m				
Physical					
LED Count	120 LEDs/m				
Cutting Unit	12 LEDs				
Cutting Unit Length	100 mm				
Minimum Bend Diameter	150mm				
Output					
LED Light	Epistar SMD LED 2835				
CRI	>80, >90				
Max Run Length*					
Single Feed	5 M				
Double Feed	10 M				
Beam Angle	120°				
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C				
Temperature Ranges					
Installation	0°C to 50°C				
Operating	-40°C to 55°C				
Dependability					
IP Rating	IP68 Wet location submersible <2m				

Illuminance Distribution

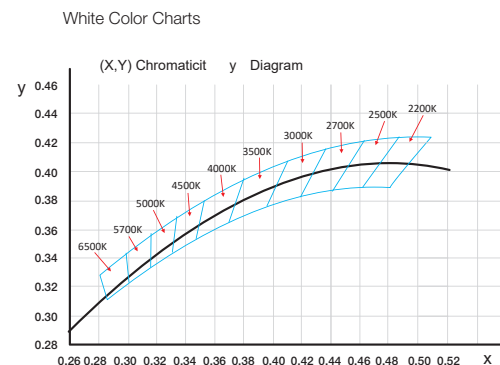
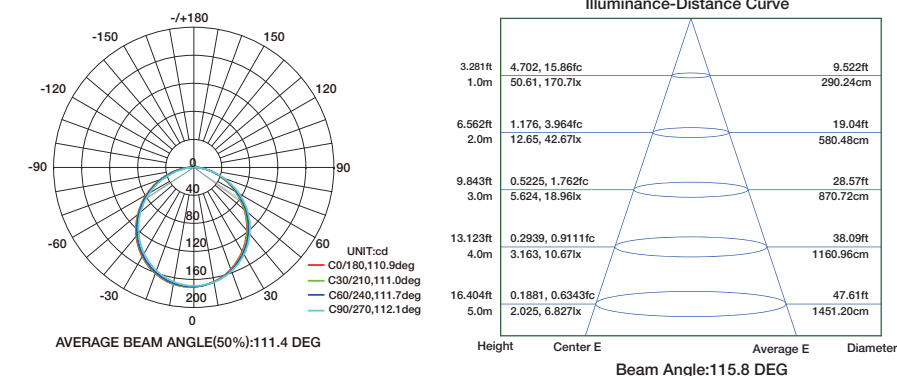


SF08 Configuration and Accessories


Mold injection Connector (IP68 Factory Assembly Only)

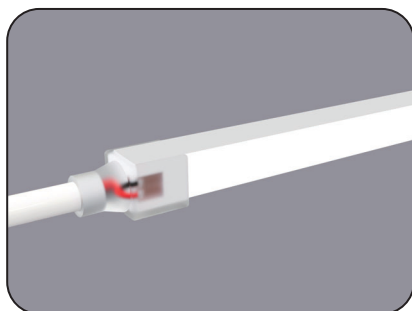



Direct Entry Connector

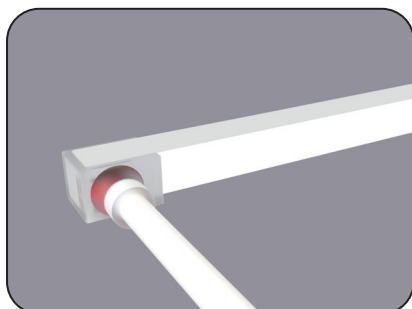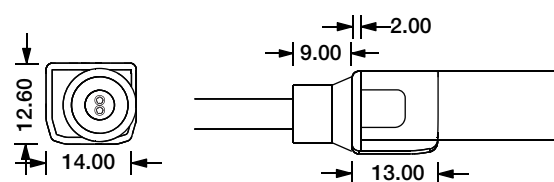



Side Entry Connector

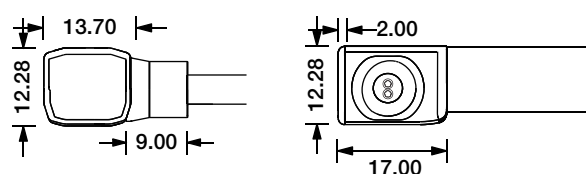


Bottom Entry Connector

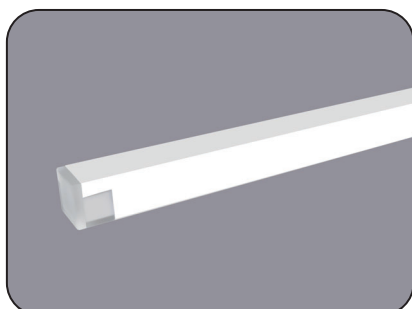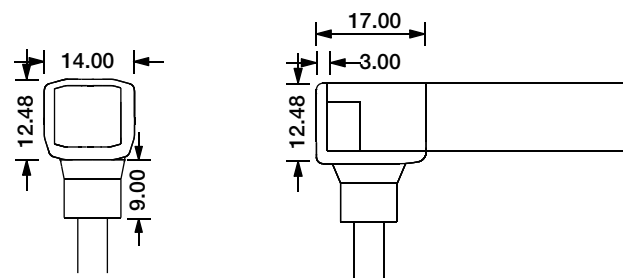


End Cap

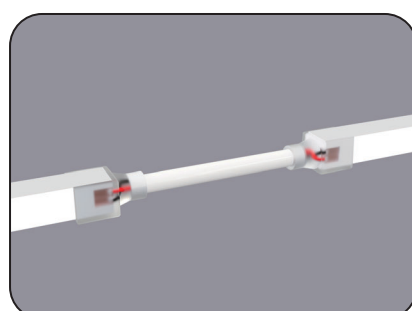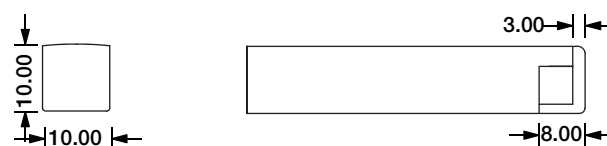


Jumper

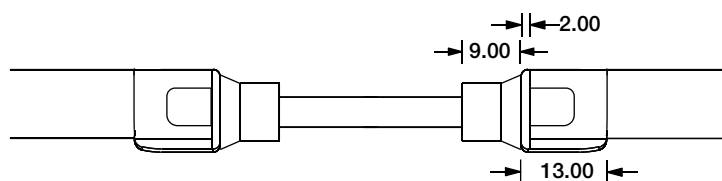



SF08 Configuration and Accessories

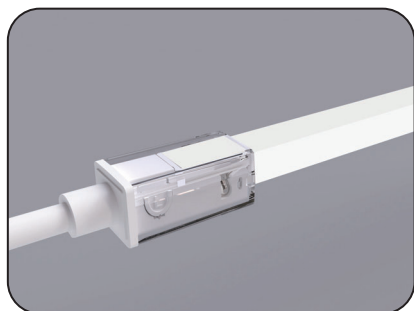


DIY Snap Connector

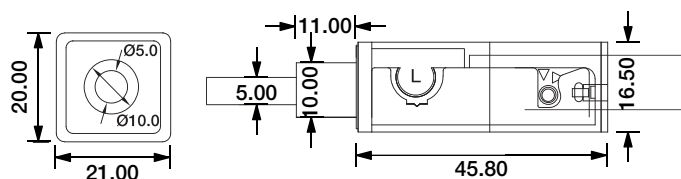



DIY Snap End Cap

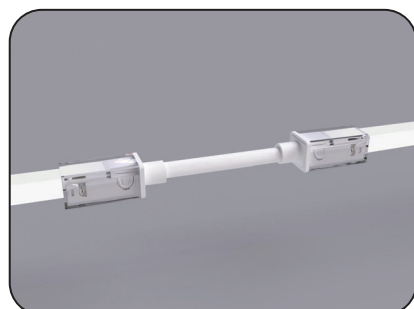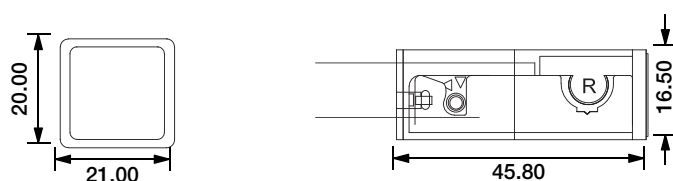


DIY Snap Extent Connector

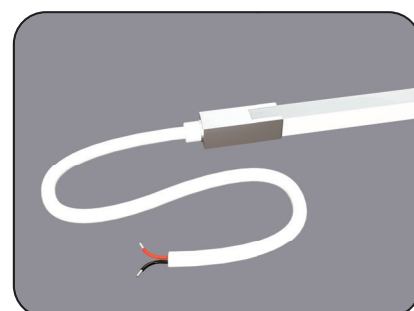


DIY Quick Connective Connector

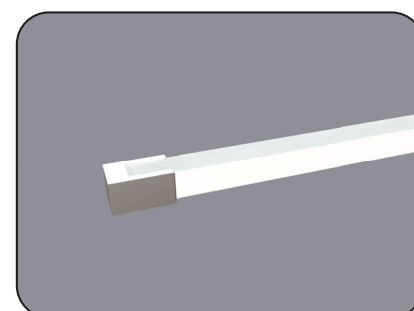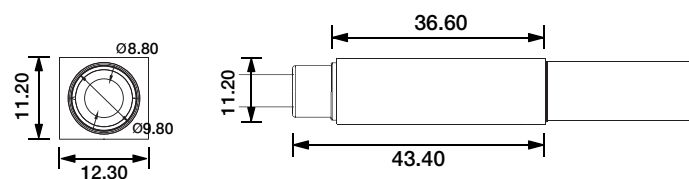


DIY Quick Connective End Cap

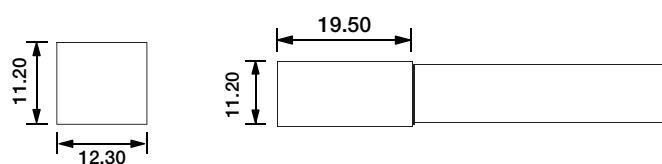


SF08 Configuration and Accessories

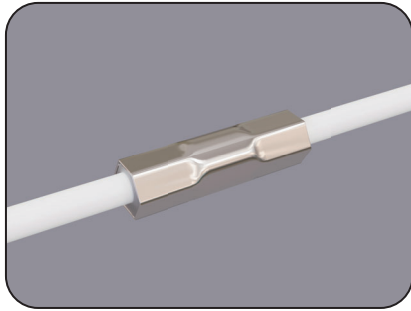

Waterproof Interrupter

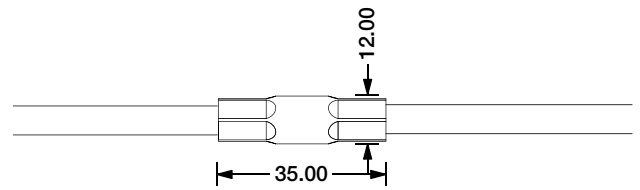

Male Connector

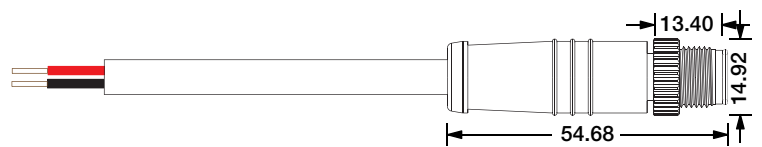

Female Connector

