


SF33 Mono Color Silicone LED Linear Flex

SF33-24V-5050-84-2200K-6500K


Specification

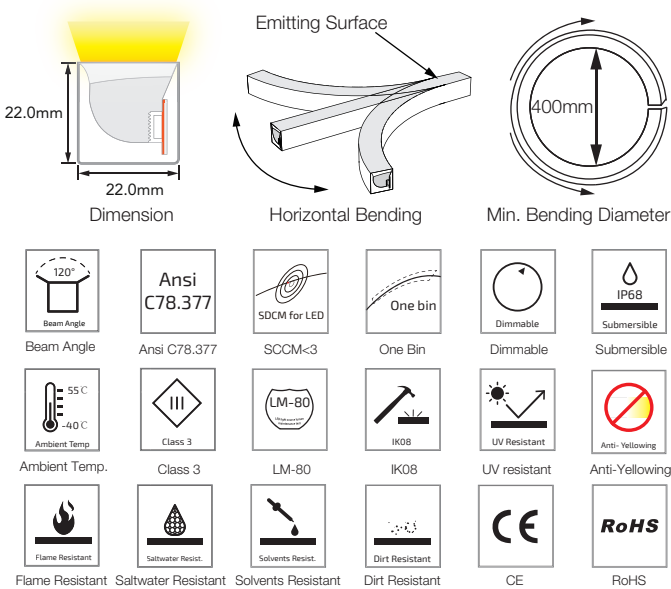

Technical Parameters

Electrical		Optional Color	
Input Voltage	24V DC		2200K(2238±102K)
Power Consumption	15W/m		2500K(2460±120K)
Physical			2700K(2725±145K)
LED Count	84 LEDs/m		3000K(3045±175K)
Cutting Unit	7 LEDs		3500K(3465±245K)
Cutting Unit Length	83.3 mm		4000K(3985±275K)
Minimum Bend Diameter	400mm		4500K(4503±243K)
Output			5000K(5209±283K)
LED Light	Epistar SMD LED 5050		5700K(5667±355K)
CRI	>80, >90		6500K(6532±510K)
Max Run Length*			Green(520-530nm)
Single Feed	8 M		Blue (455-465nm)
Double Feed	16 M		Lemon Yellow (570-580nm)
Beam Angle	120°		Pink (610-620nm)
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C		
Temperature Ranges			
Installation	0°C to 50°C		
Operating	-40°C to 55°C		
Dependability			
IP Rating	IP68 Wet location submersible <2m		

Illuminance Distribution


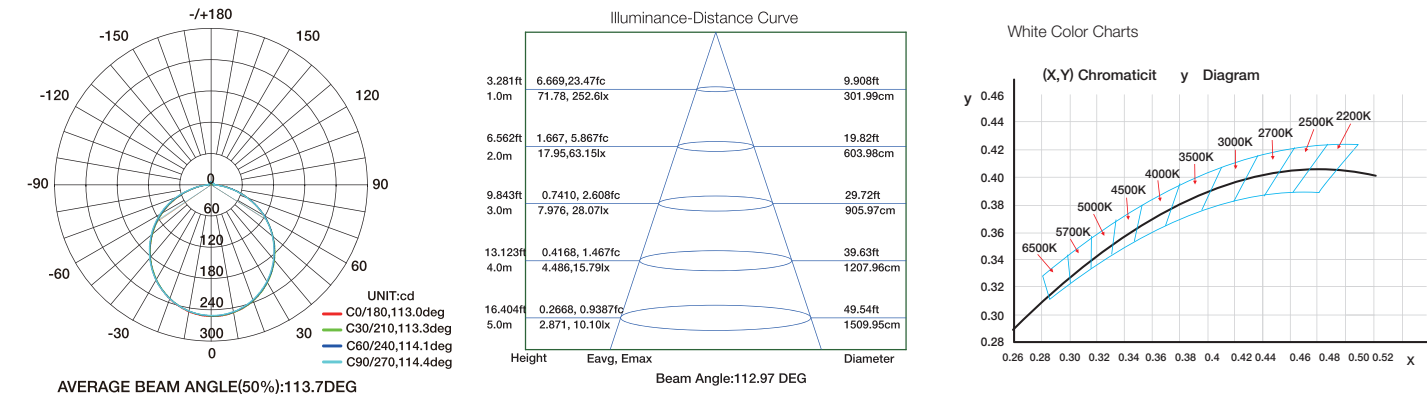


SF33 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)





Direct Entry Connector

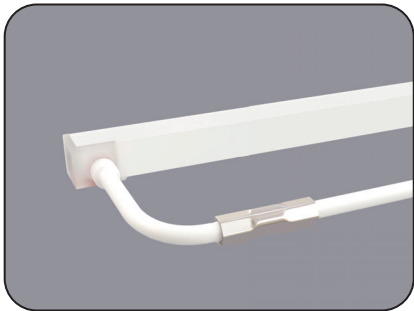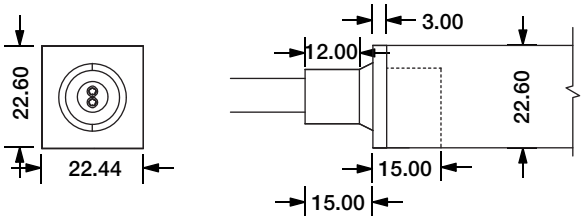



Side Entry Connector

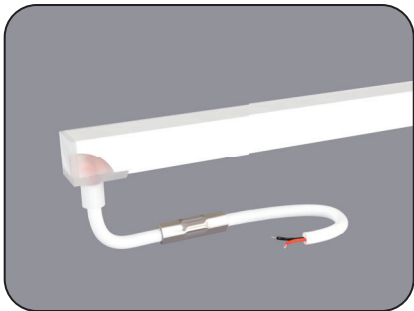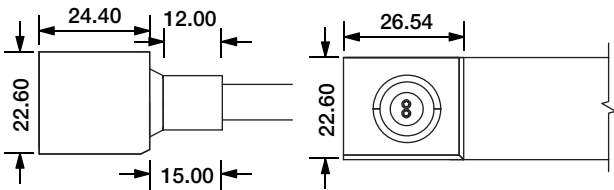


Bottom Entry Connector

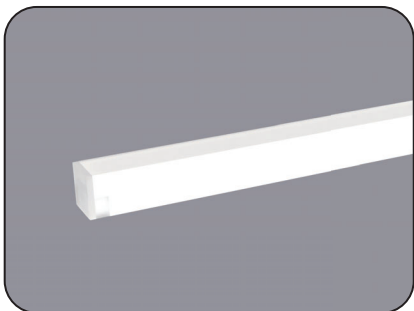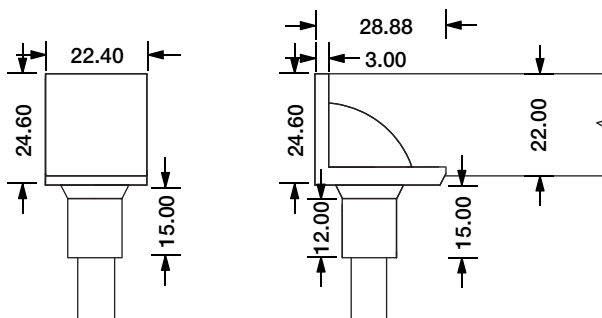


End Cap

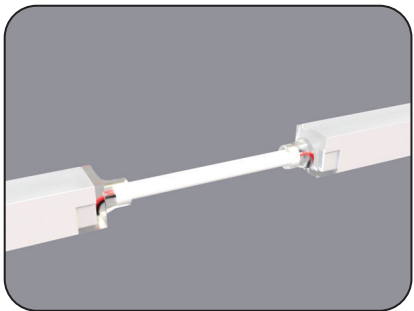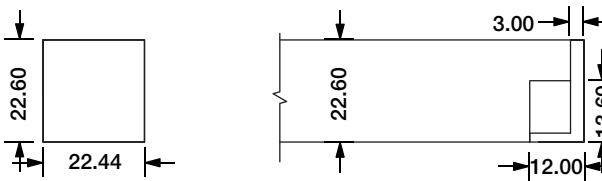



Jumper

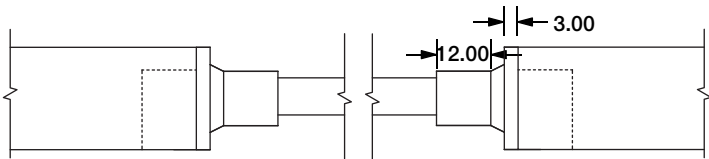


SF33 Configuration and Accessories

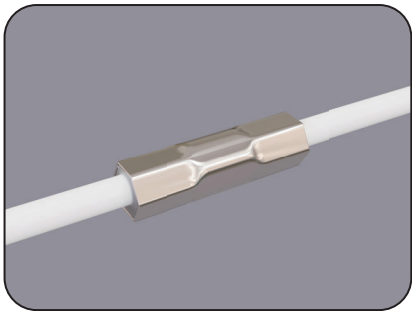

Waterproof Interrupter

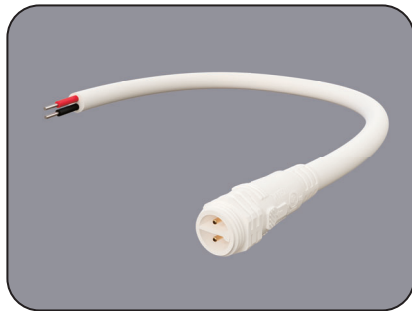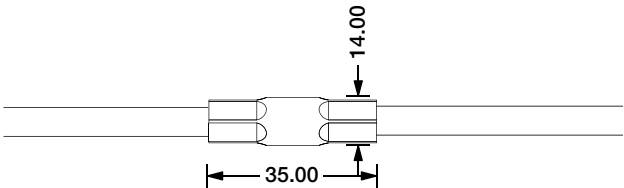

Male Connector

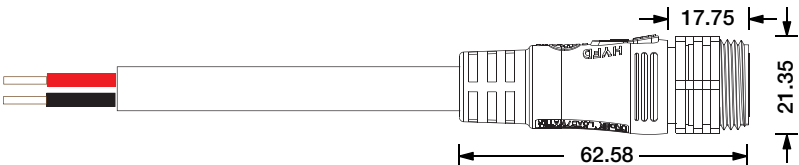

Female Connector

