
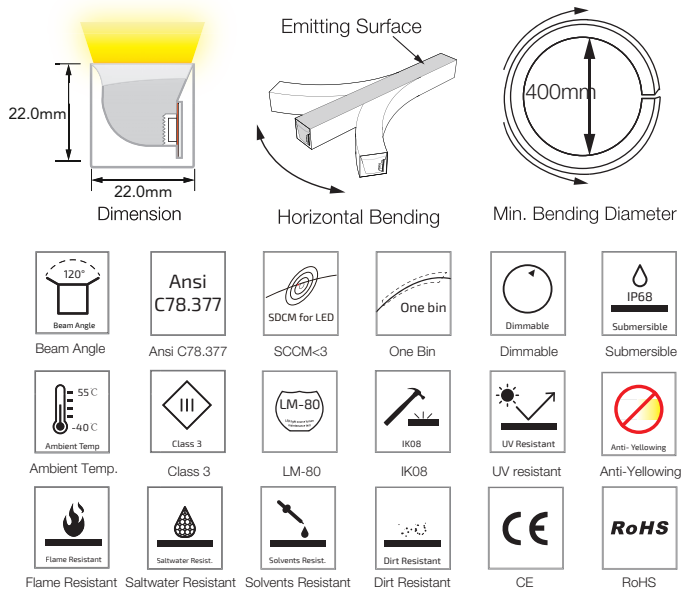


SF33 Mono Color Silicone LED Linear Flex

SF33-48V-2835-96-CC-2200K~6500K-2W


Specification

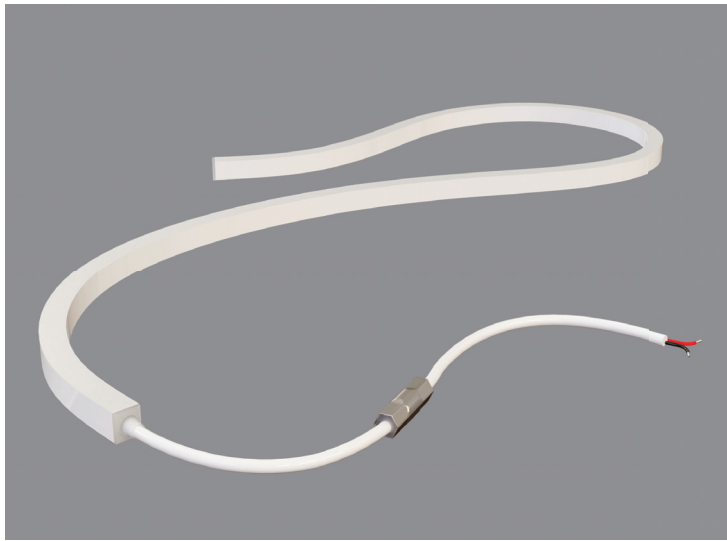

Technical Parameters

Electrical		Optional Color	
Input Voltage	48V DC (Built In Constant Current)		
Power Consumption	2W/m		
Physical			
LED Count	96 LEDs/m		
Cutting Unit	12 LEDs		
Cutting Unit Length	125 mm		
Minimum Bend Diameter	400mm		
Output			
LED Light	Epistar SMD LED 2835		
CRI	>80, >90		
Max Run Length*			
Single Feed	152 M		
Double Feed	304 M		
Beam Angle	120°		
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C		
Temperature Ranges			
Installation	0°C to 50°C		
Operating	-40°C to 55°C		
Dependability			
IP Rating	IP68 Wet location submersible <2m		

Illuminance Distribution


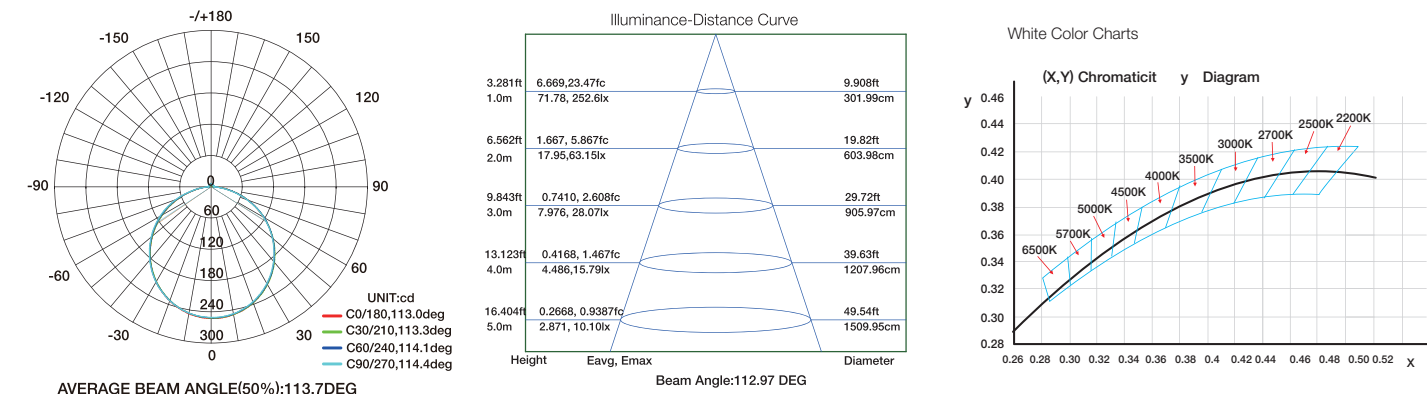


SF33 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)





Direct Entry Connector

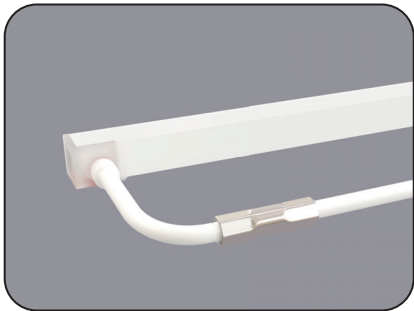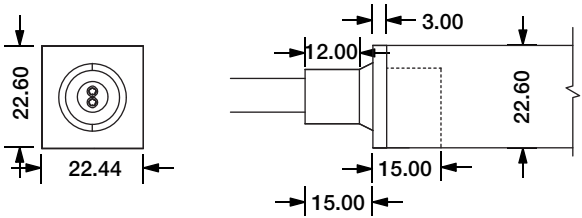



Side Entry Connector

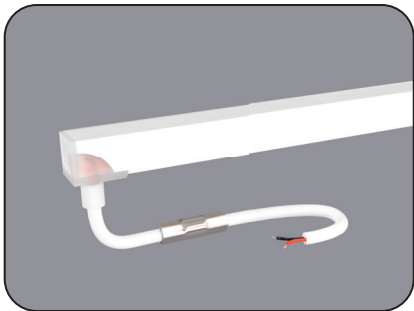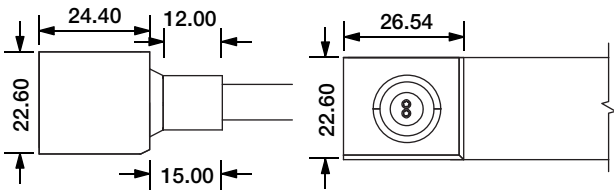


Bottom Entry Connector

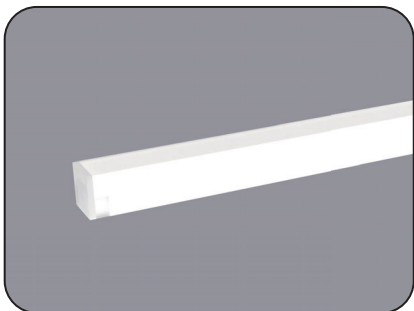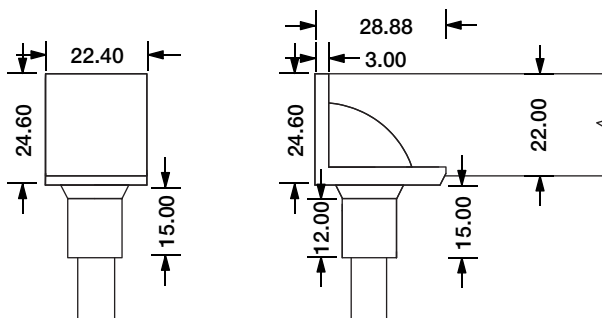


End Cap

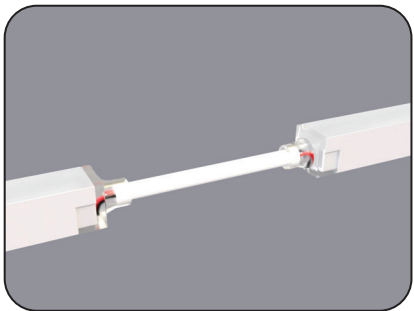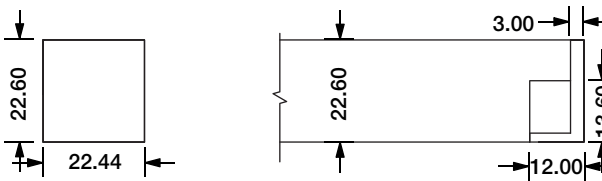



Jumper

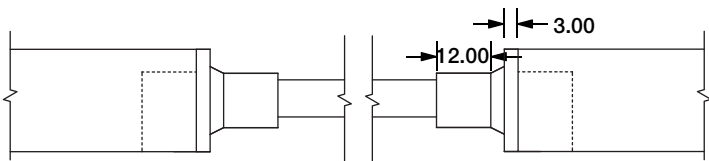


SF33 Configuration and Accessories

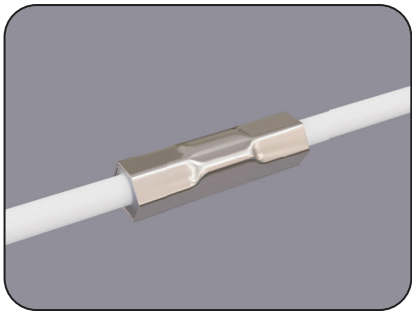

Waterproof Interrupter

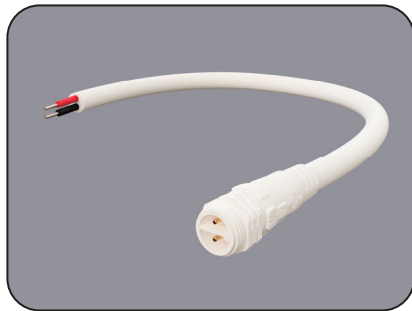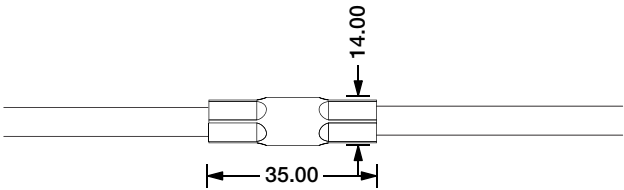

Male Connector

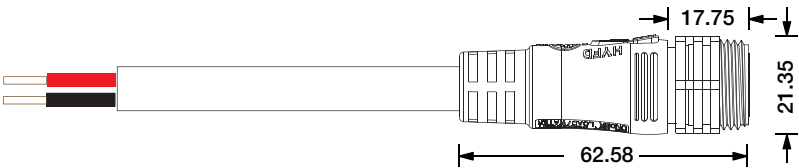

Female Connector

