
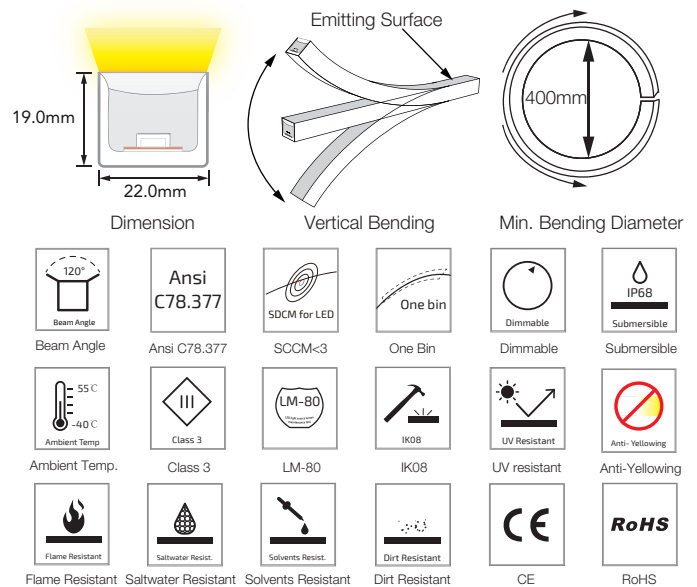


SF34 Mono Color Silicone LED Linear Flex

SF34-24V-3528-144-2200K-6500K

Specification

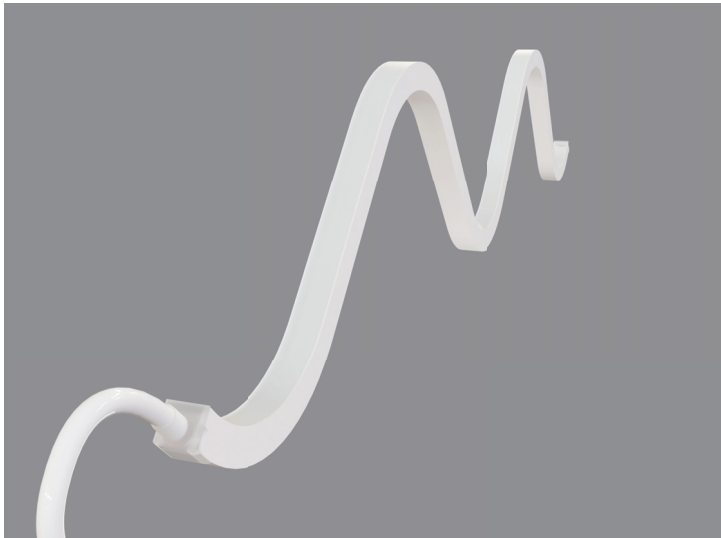



Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	10W/m
Physical	
LED Count	144 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	83.3 mm
Minimum Bend Diameter	400mm
Output	
LED Light	Epistar SMD LED 3528
CRI	>80, >90
Max Run Length*	
Single Feed	10 M
Double Feed	20 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	


Optional Color	
	2200K(2238±102K)
	2500K(2460±120K)
	2700K(2725±145K)
	3000K(3045±175K)
	3500K(3465±245K)
	4000K(3985±275K)
	4500K(4503±243K)
	5000K(5209±283K)
	5700K(5667±355K)
	6500K(6532±510K)
	Green(520-530nm)
	Blue (455-465nm)
	Pink (610-620nm)
	Red (620-630nm)
	Amber (585-595nm)
	Orange (595-605nm)

IP Rating	IP68 Wet location submersible <2m
-----------	-----------------------------------

Illuminance Distribution

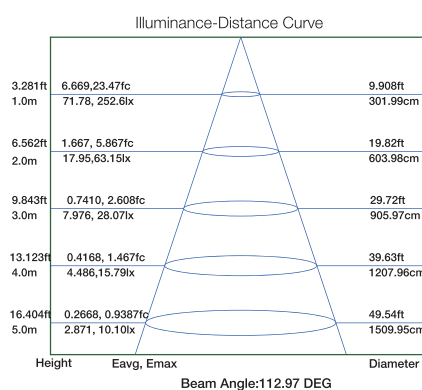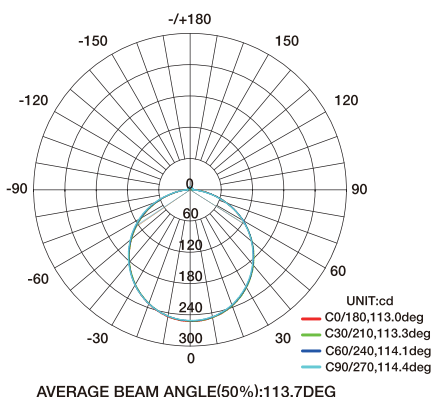

White Color Charts


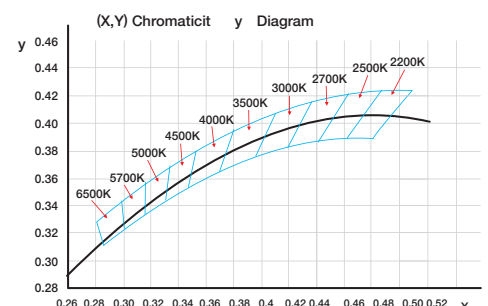


SF34 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)





Direct Entry Connector

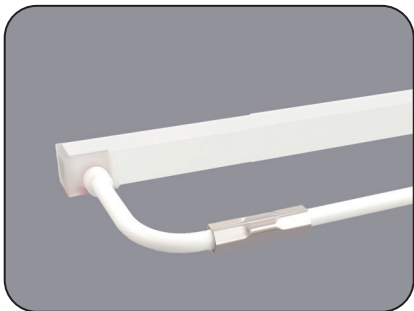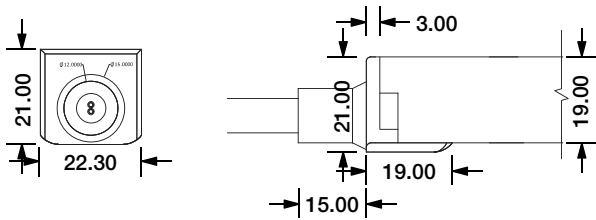



Side Entry Connector

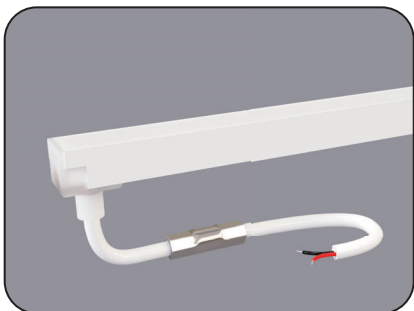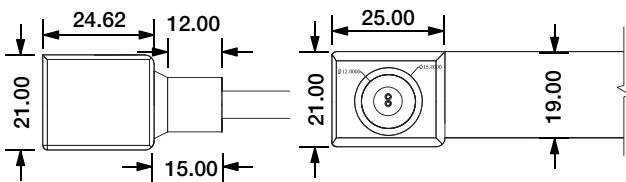


Bottom Entry Connector

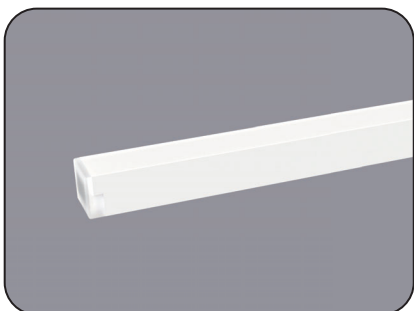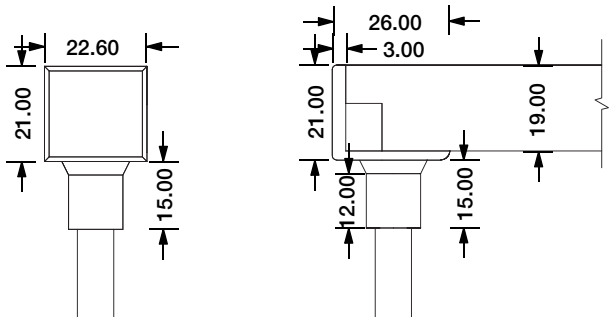


End Cap

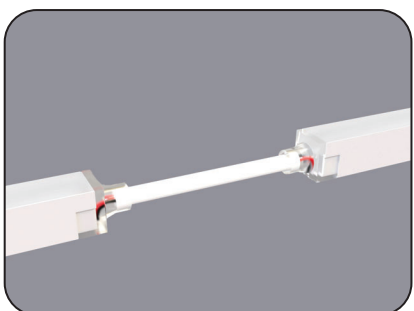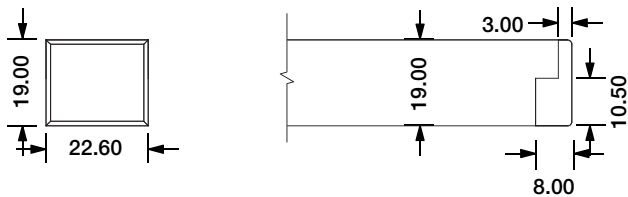



Jumper

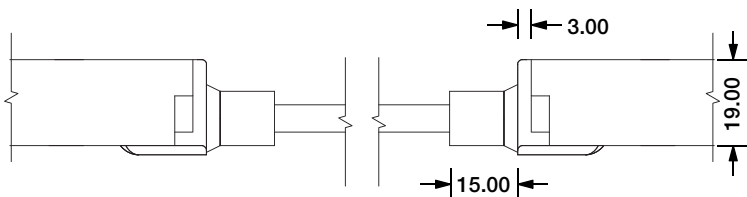


SF34 Configuration and Accessories

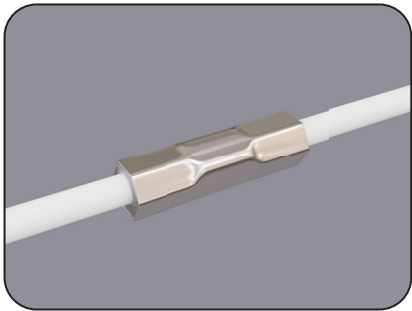

Waterproof Interrupter

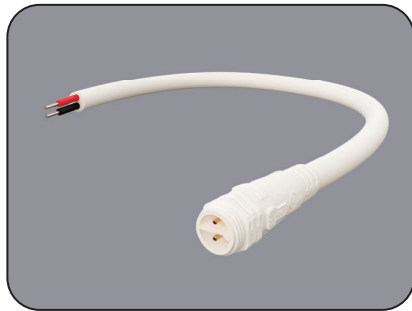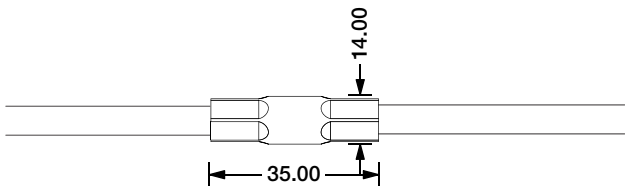

Male Connector

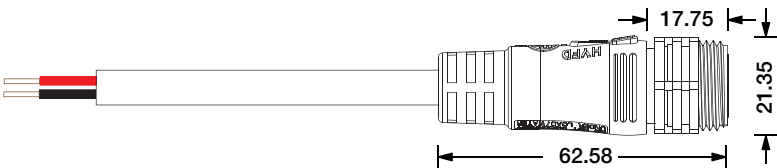

Female Connector

