
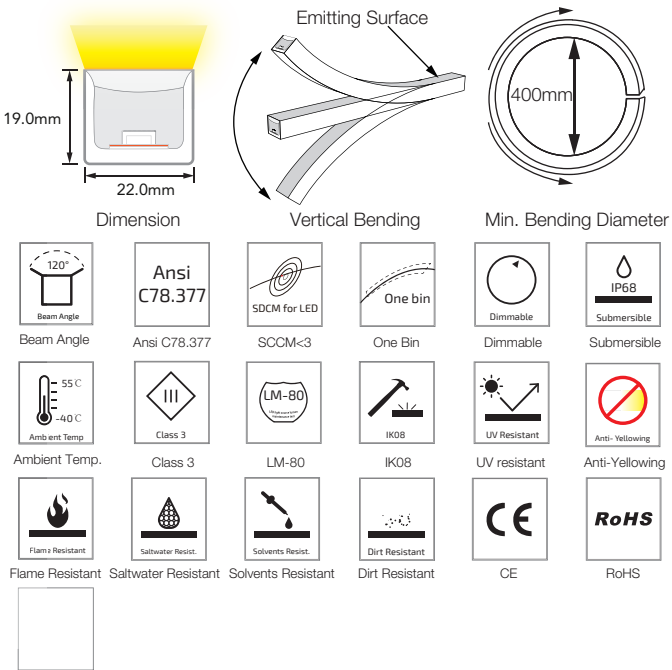


SF34 Tunable White Silicone LED Linear Flex

SF34-24V-2835-120-DW

Specification


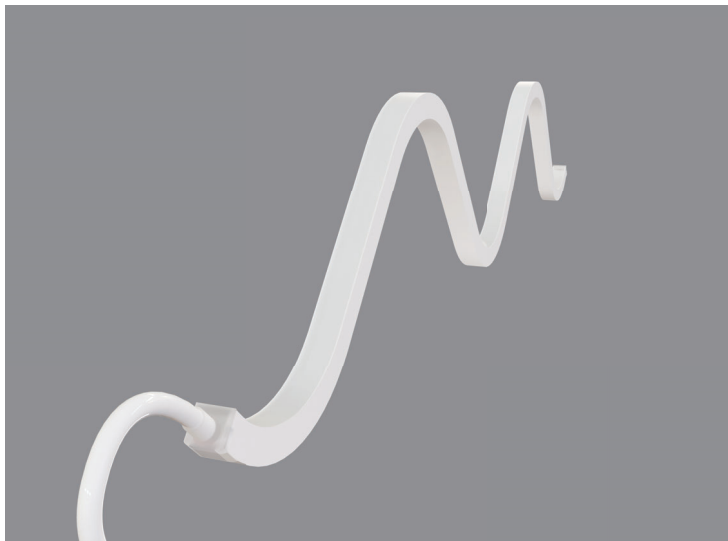


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	12W/m
Physical	
LED Count	120 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	100 mm
Minimum Bend Diameter	400mm
Output	
LED Light	Epistar SMD LED 2835
CRI	>80, >90
Max Run Length*	
Single Feed	10 M
Double Feed	20 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
IP Rating	IP68 Wet location submersible <2m

Optional Color Combinations	
	2200K+5700K
	2700K+5700K
	3000K+5700K

Illuminance Distribution

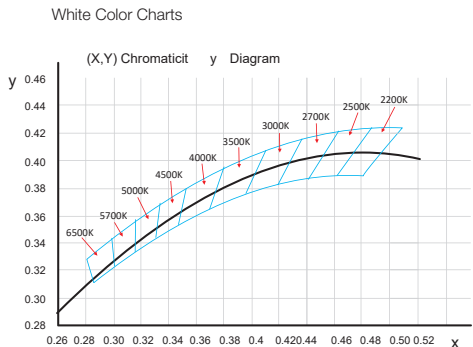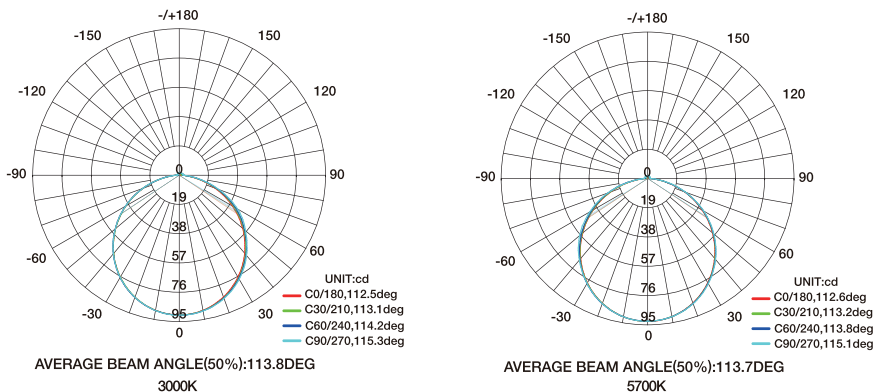


SF34 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)





Direct Entry Connector

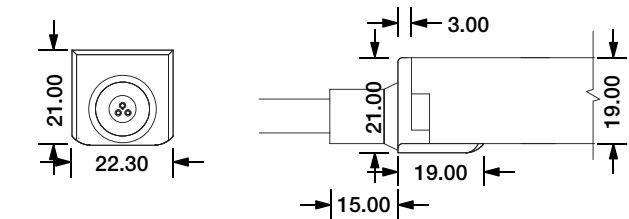



Side Entry Connector

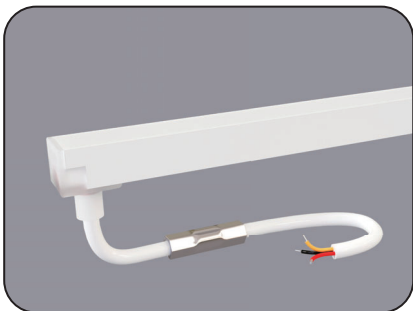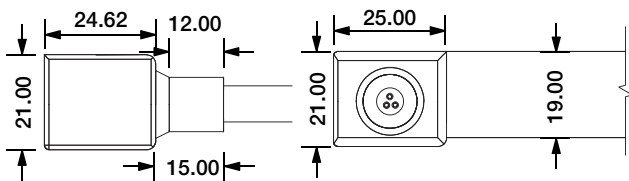


Bottom Entry Connector

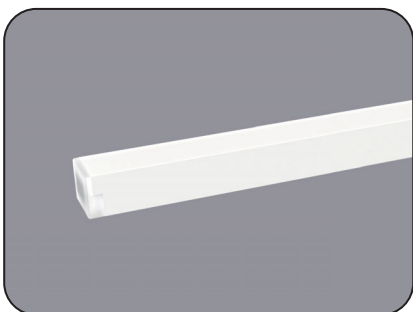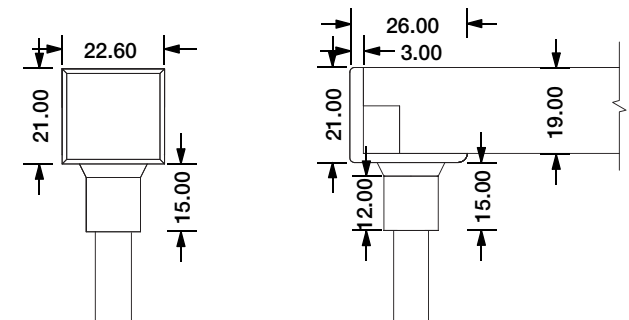


End Cap

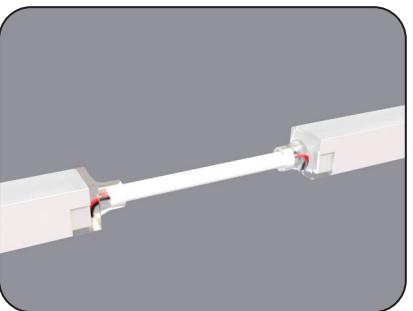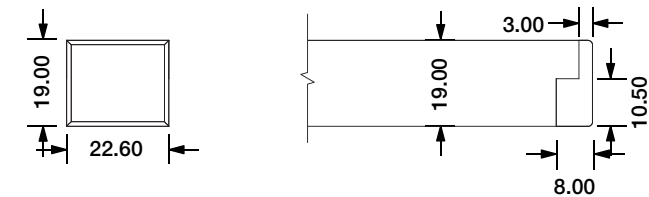


Jumper

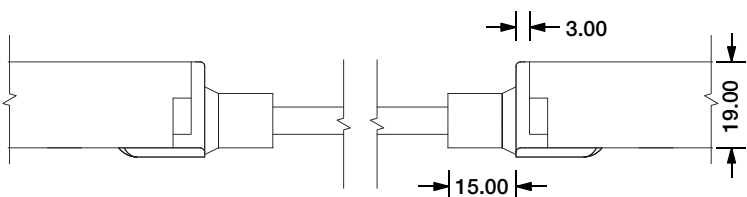


SF34 Configuration and Accessories

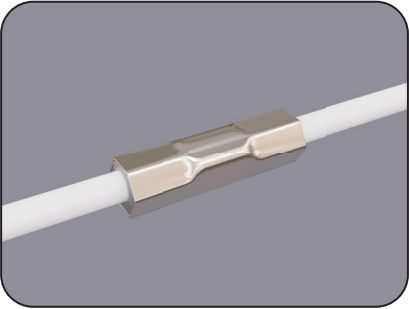

Waterproof Interrupter

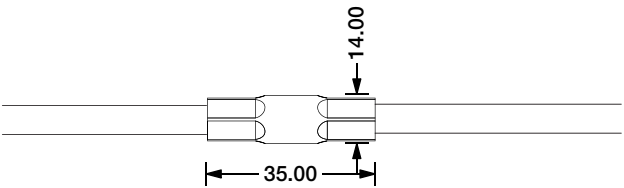

Male Connector

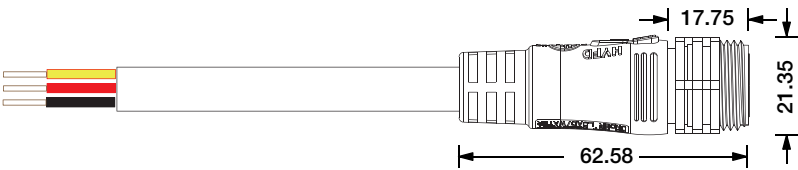

Female Connector

