
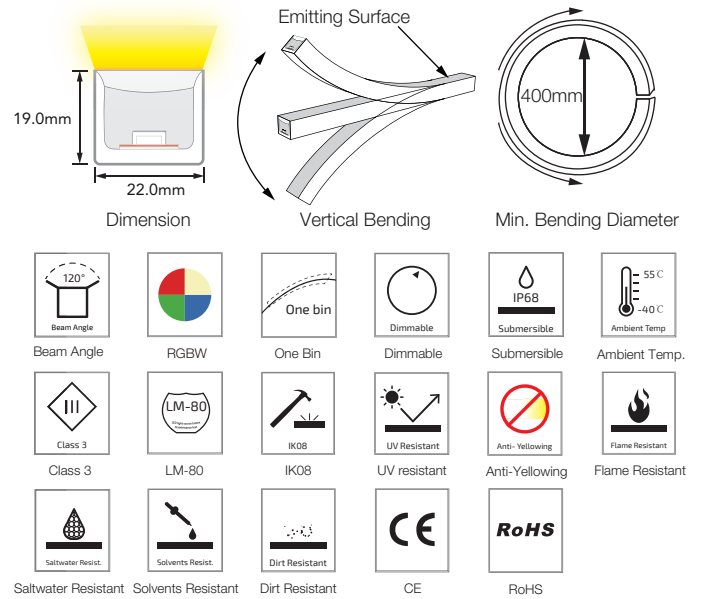


SF34 Multi Color RGBW Silicone LED Linear Flex

SF34-24V-5050-72-RGBW

Specification

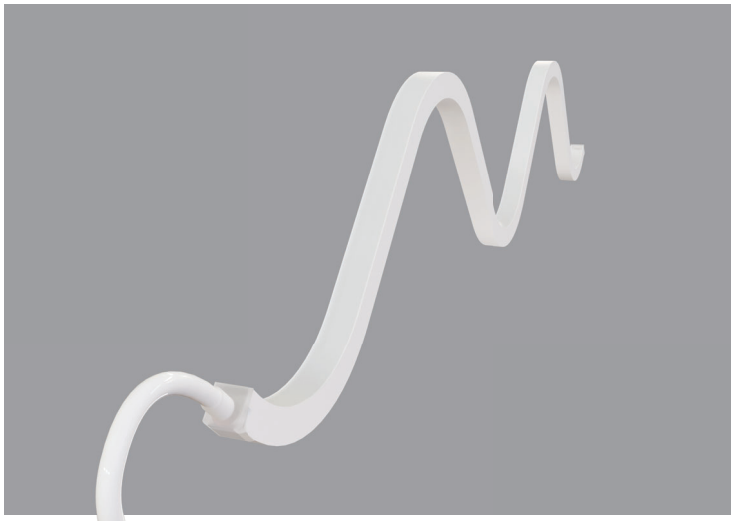


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	17W/m
Physical	
LED Count	72 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	83.3mm
Minimum Bend Diameter	400mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGBW(2700/3000/4000K/5000K)
Max Run Length*	
Single Feed	8 M
Double Feed	16 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
IP Rating	IP68 Wet location submersible <2m

Emitting Color	
	Red
	Green
	Blue
	RGB(White)
	3000K

Illuminance Distribution

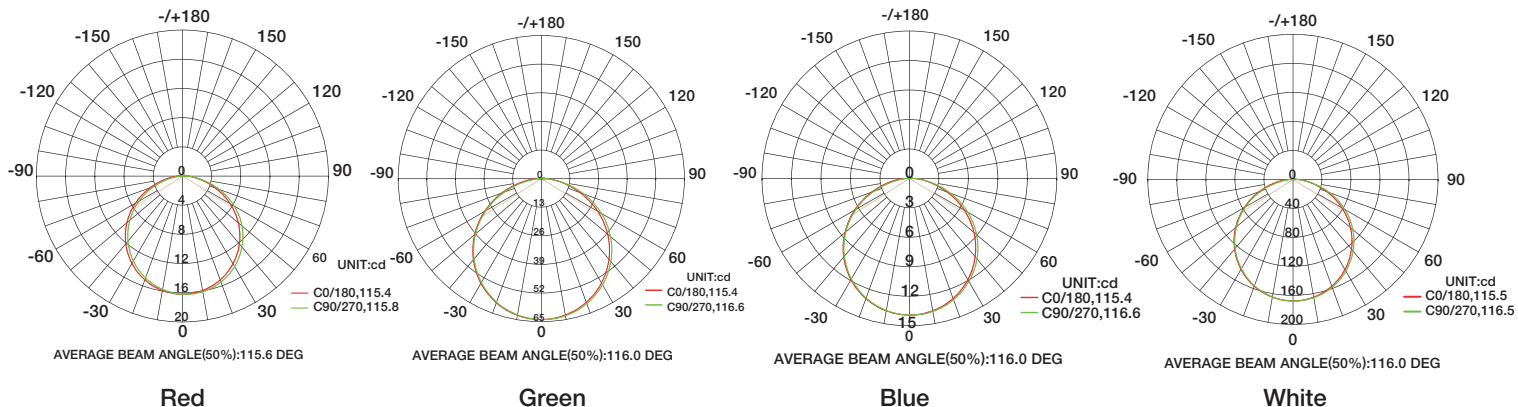


SF34 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)





Direct Entry Connector

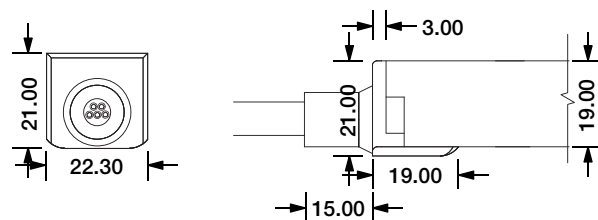



Side Entry Connector

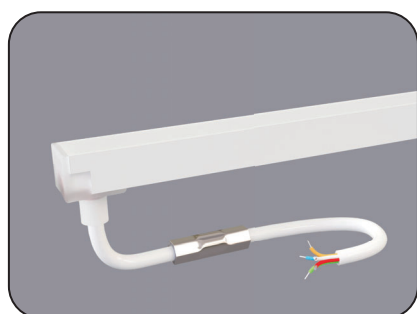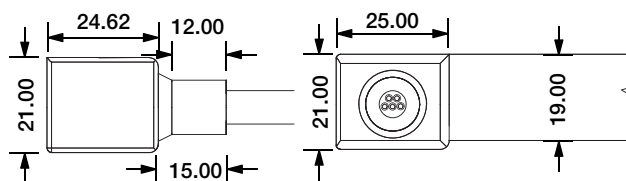


Bottom Entry Connector

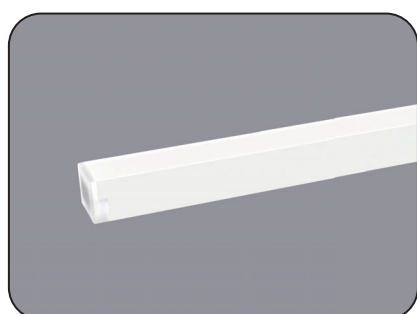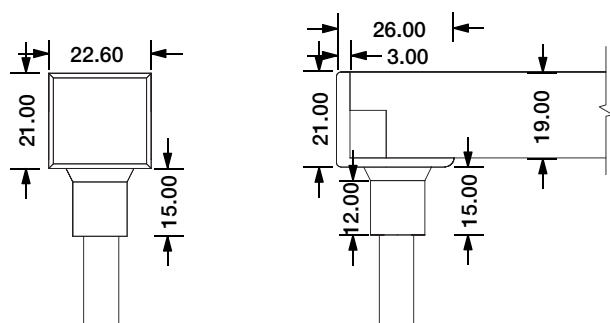


End Cap

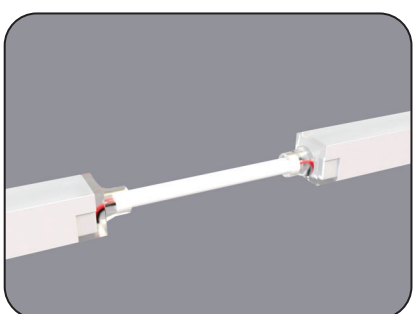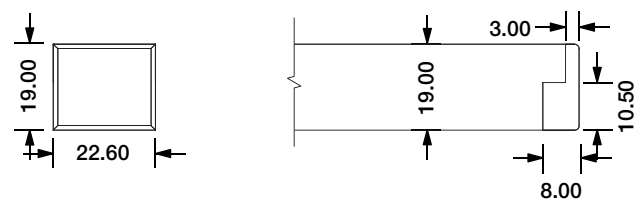


Jumper

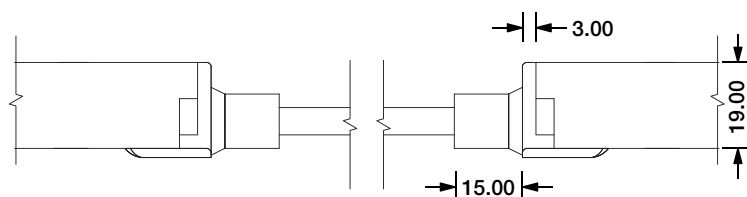



SF34 Configuration and Accessories

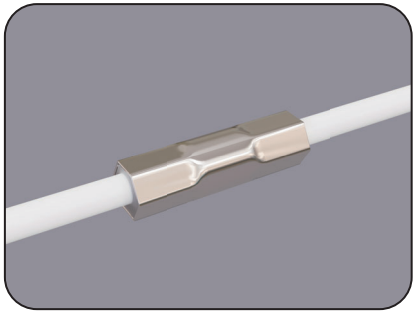

Waterproof Interrupter

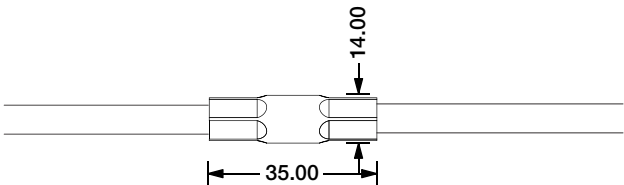

Male Connector

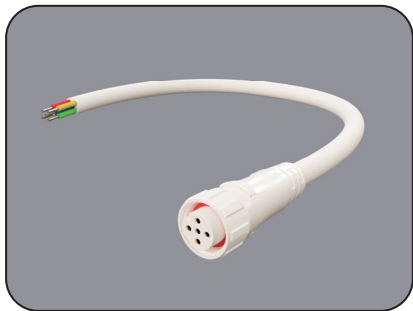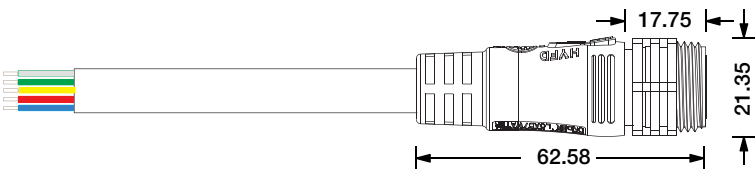

Female Connector

