




SFW20 Tunable White Silicone Flexible LED Wall Grazer

SFW20-24V-3535-24-DW


Specification

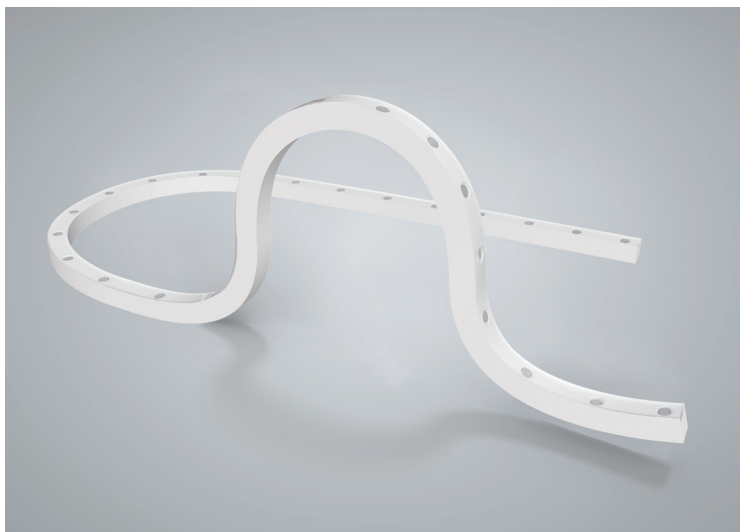

Dimension

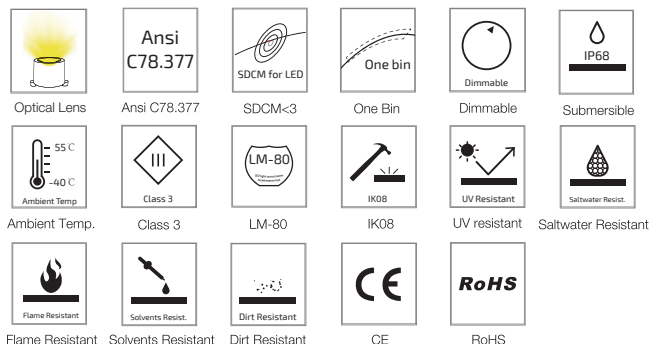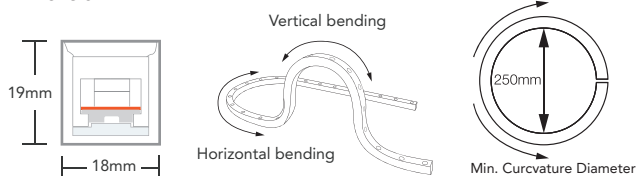


Optional LENS Distribution

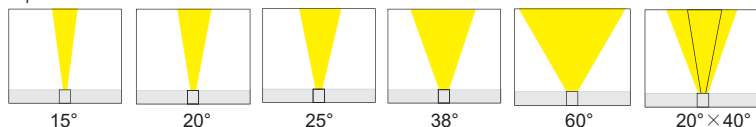

Technical Parameters


Electrical	
Input Voltage	24V DC
Power Consumption	19W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	3 LEDs
Cutting Unit Length	125mm
Mini. Curvature Diameter:	250mm(Horizontal)/400mm(Vertical)
Output	
LED Light	Epistar SMD LED 3535
CRI	>80
Max. Run Length*	
Single Feed	5 M
Double Feed	10 M
Optional Lens	15°, 20°, 25°, 38°, 60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C

Color Combinations



2700K+5700K

Optional Cover:

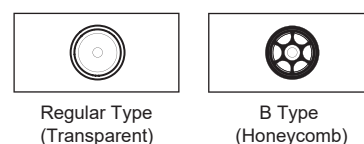


Dependability


IP Rating

IP68


Illuminance Distribution

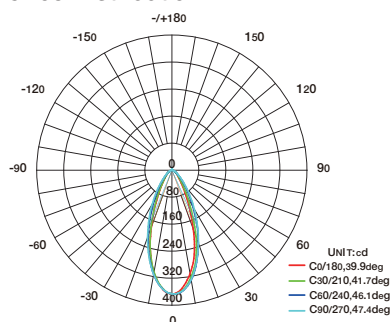

AVERAGE BEAM ANGLE(50%):43.8 DEG
2700K Angle: 20° X 40°

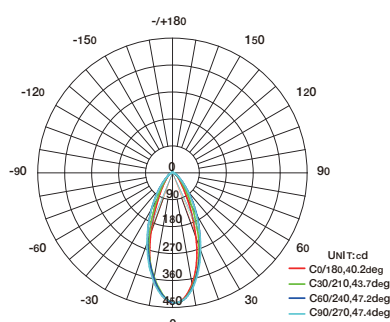


AVERAGE BEAM ANGLE(50%):44.6 DEG
5700K Angle: 20° X 40°

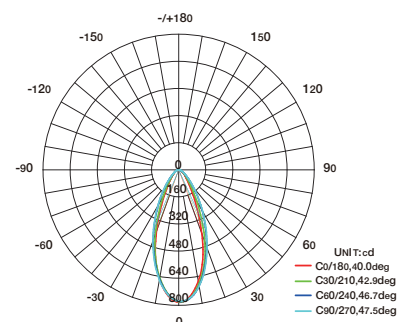


AVERAGE BEAM ANGLE(50%):44.3 DEG
2700K+5700K Angle: 20° X 40°

SFW20 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)

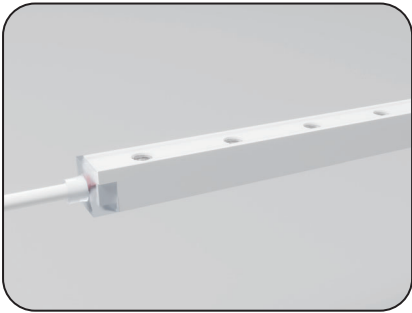



Direct Entry Connector

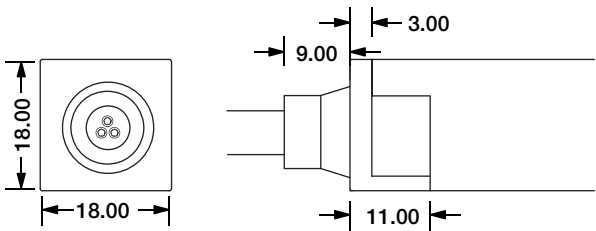



Bottom Entry Connector

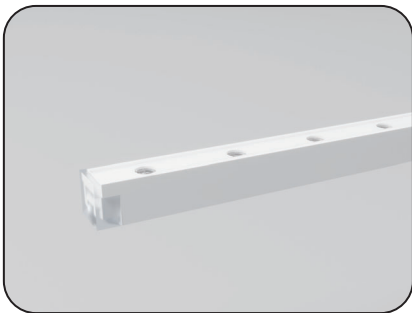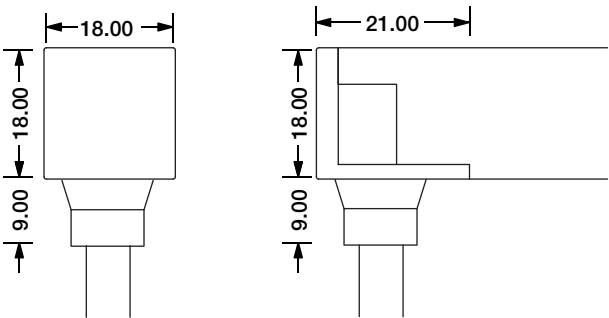


End Cap

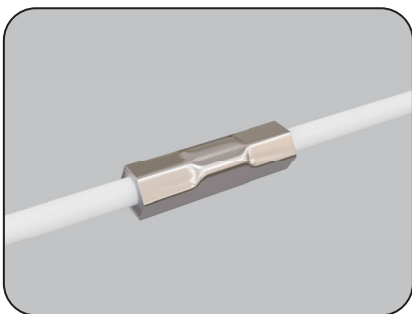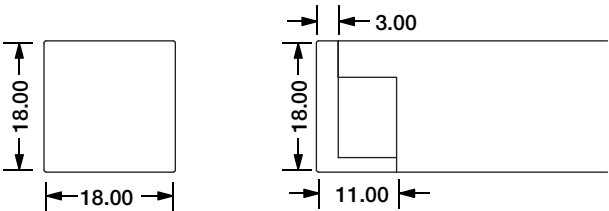


Waterproof Interrupter

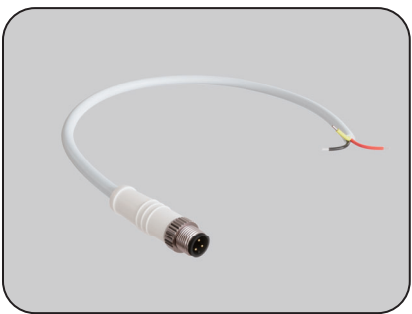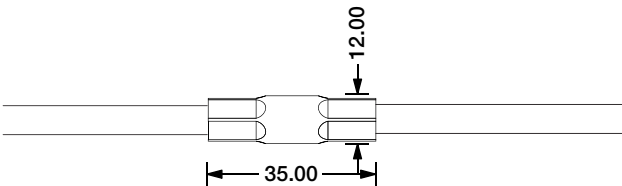



Male Connector

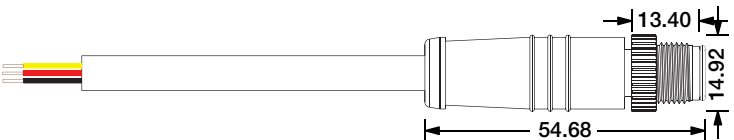



SFW20 Configuration and Accessories

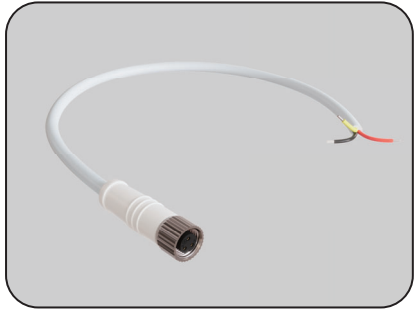



Female Connector

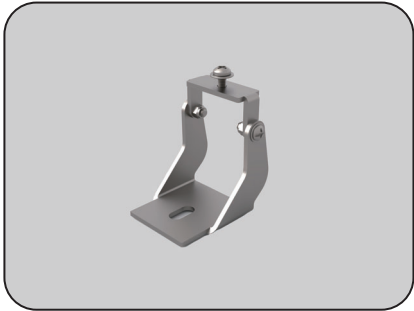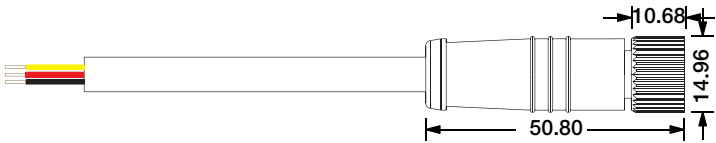


Angle Adjustable Bracket

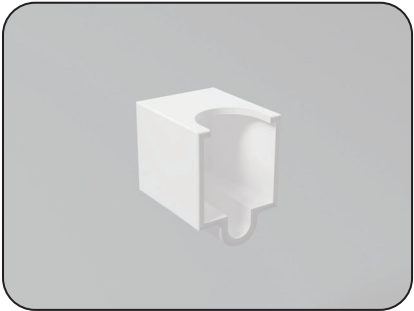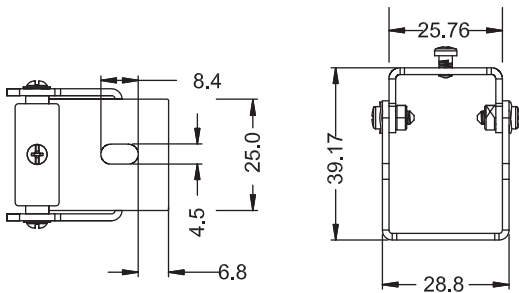


DIY Front Connector Accessories

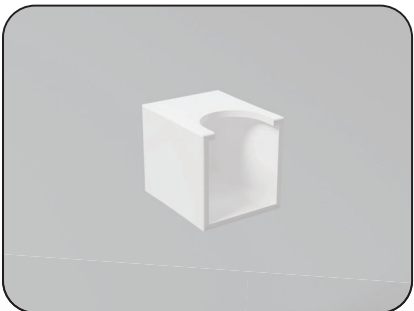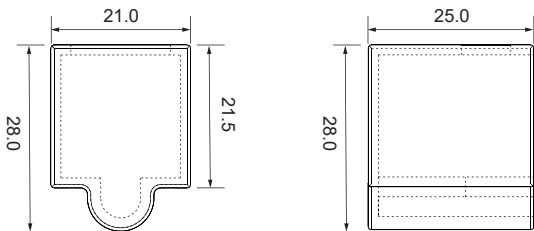


DIY End Connector Accessories

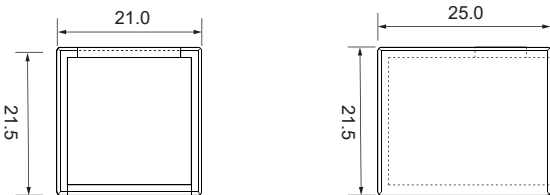



DIY Connected Cable



SFW20 LED Wall Grazer Mounting Channel

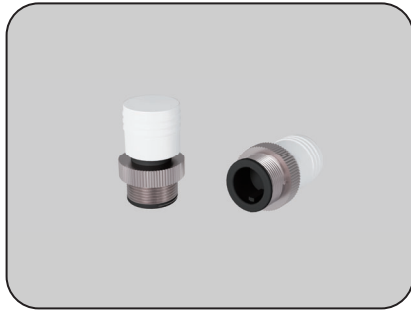

Male Connector End Cap

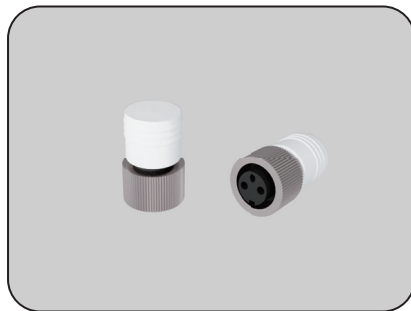

Female Connector End Cap

