




SFW20 Multi Color RGB Silicone Flexible LED Wall Grazer

SFW20-24V-3535-24-RGB


Specification

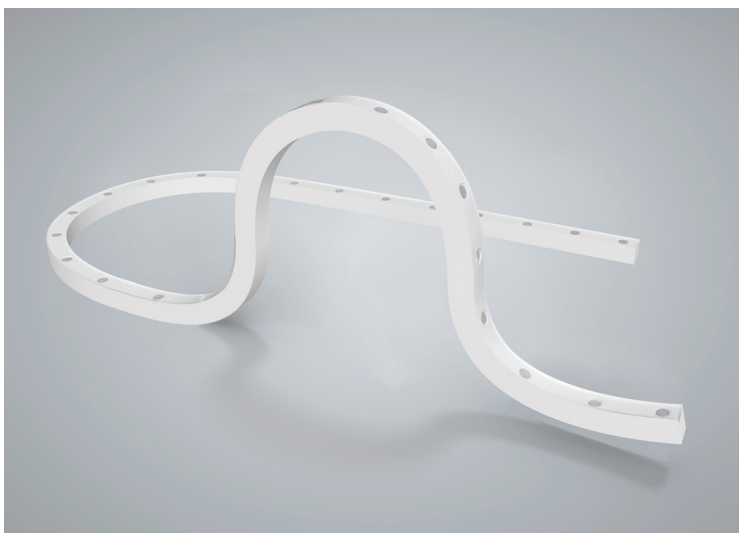


Dimension

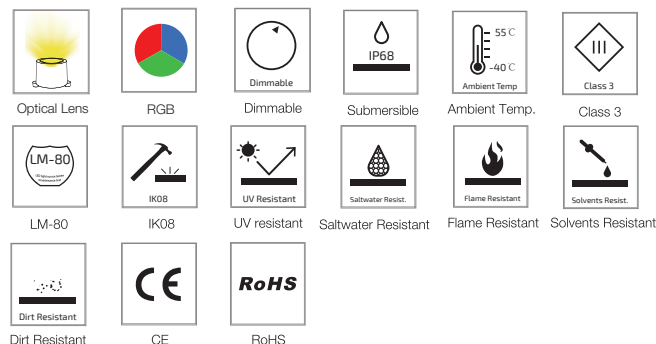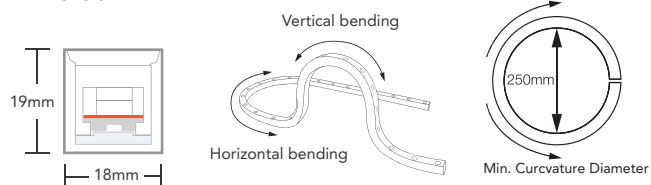

Optional LENS Distribution



Optional Cover:

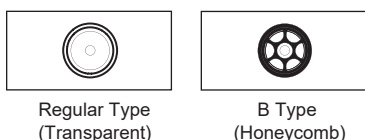




Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	18W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	250mm
Mini. Curvature Diameter:	250mm(Horizontal)/400mm(Vertical)
Output	
LED Light	Epistar SMD LED 3535
CRI	>80
Max. Length Single Feed	4 M
Optional Lens	60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
IP Rating	IP68

Emitting Color




Illuminance Distribution

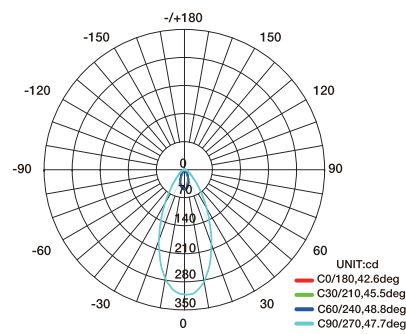


SFW20 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)

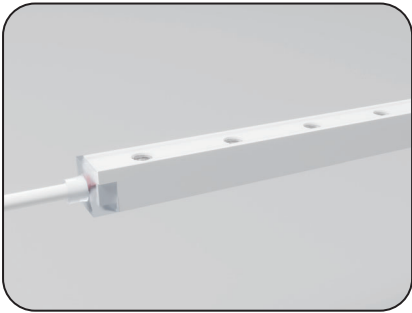



Direct Entry Connector

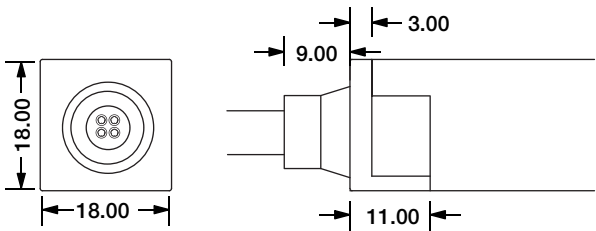



Bottom Entry Connector

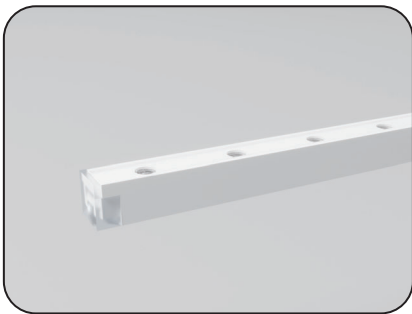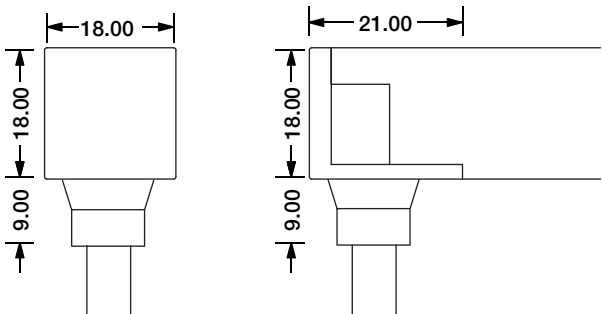


End Cap

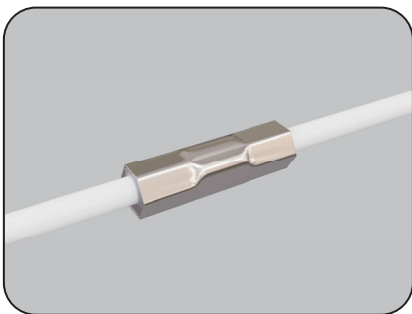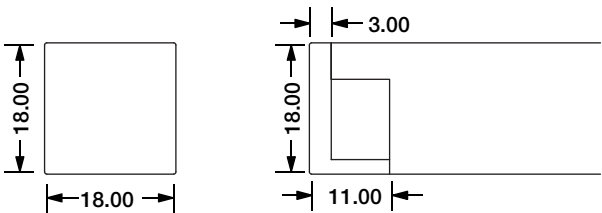


Waterproof Interrupter

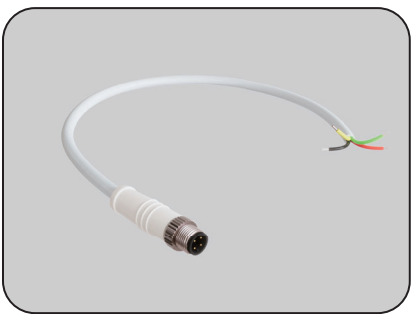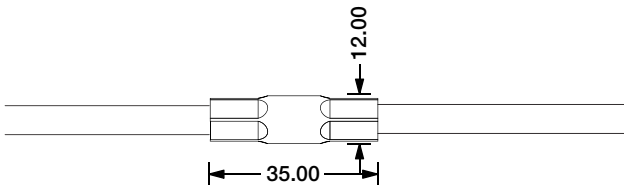



Male Connector

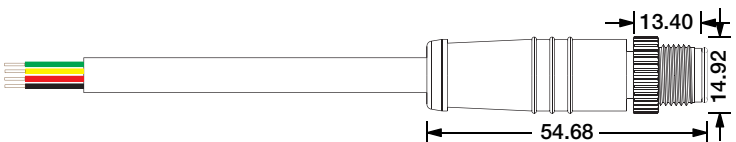



SFW20 Configuration and Accessories

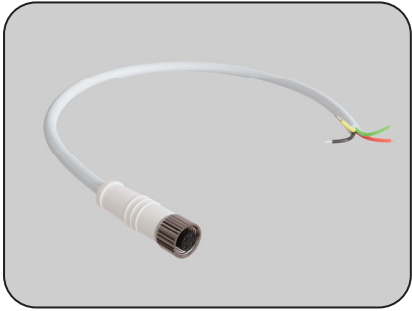



Female Connector

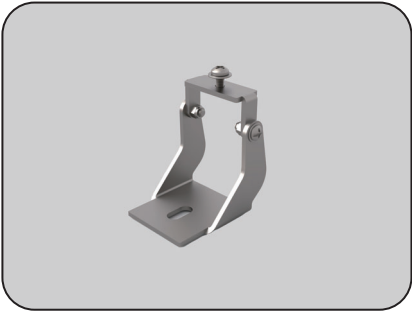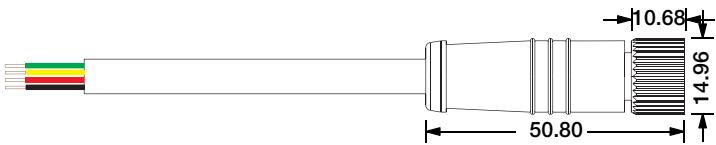



Angle Adjustable Bracket

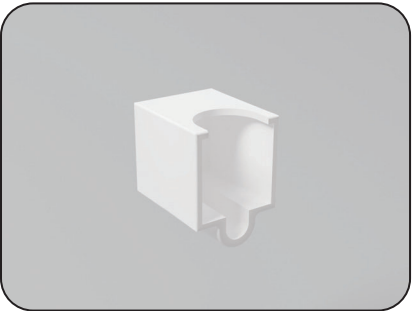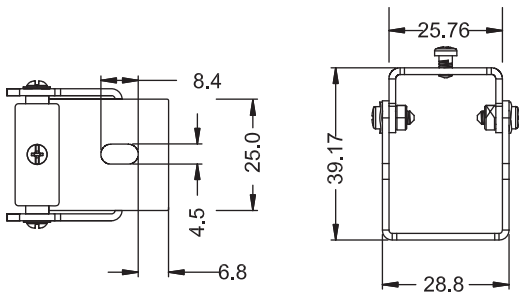


DIY Front Connector Accessories

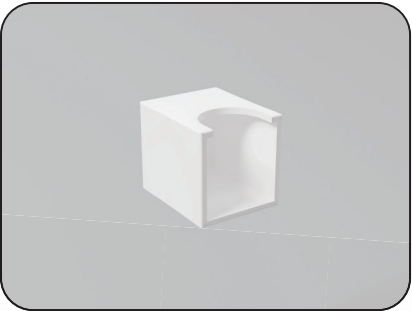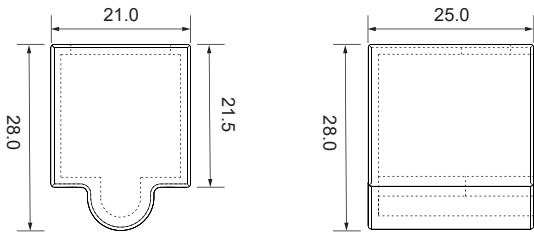


DIY End Connector Accessories

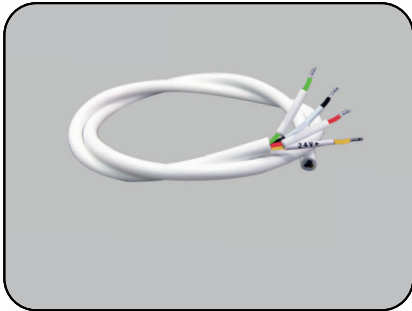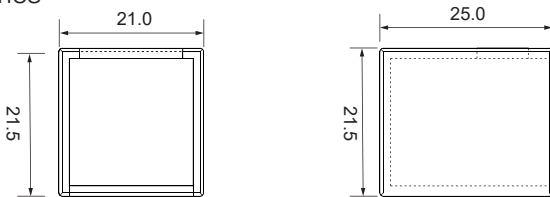



DIY Connected Cable



SFW20 LED Wall Grazer Mounting Channel

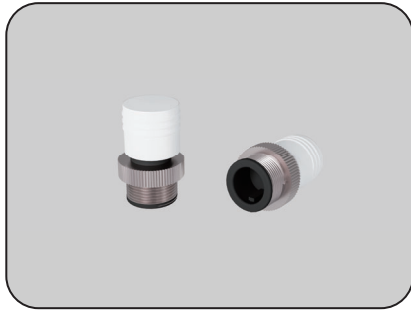

Male Connector End Cap

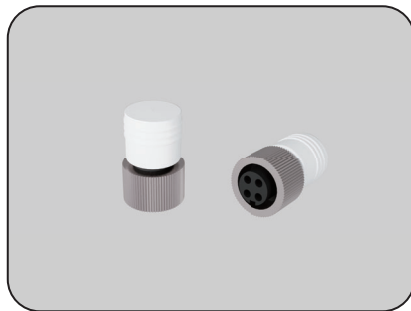

Female Connector End Cap

