






SFW20 Multi Color RGBW Silicone Flexible LED Wall Grazer

SFW20-24V-3535-24-RGBW


Specification

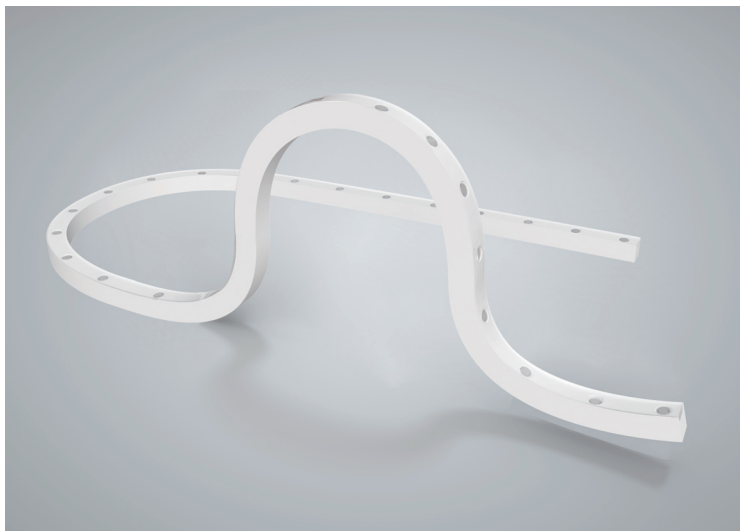

Dimension

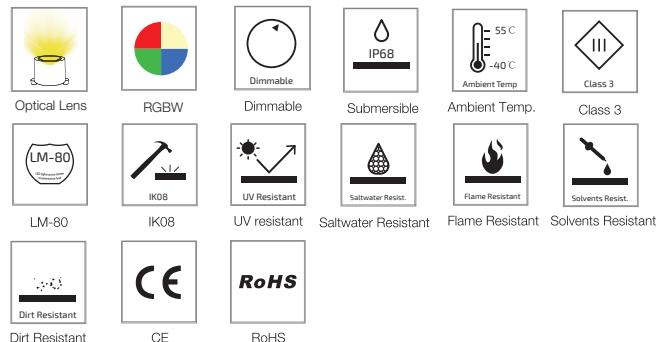


Optional LENS Distribution

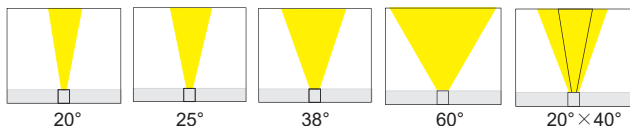


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	24W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	250mm
Mini. Curvature Diameter:	250mm(Horizontal)/400mm(Vertical)
Output	
LED Light	Epistar SMD LED 3535
Color	RGBW(3000K/4000K/6000K)
Max. Length Single Feed	3.5M
Optional Lens	20°, 25°, 38°, 60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
IP Rating	IP68




Optional Cover:

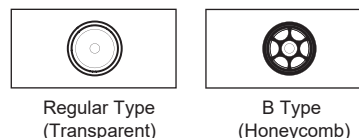

Emitting Color




Illuminance Distribution

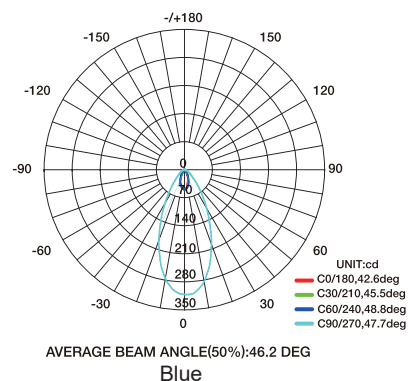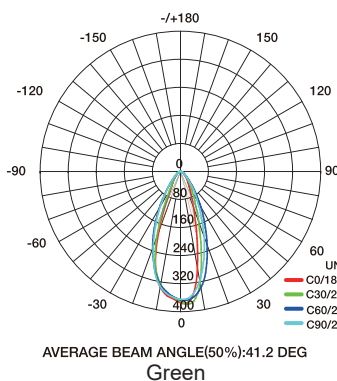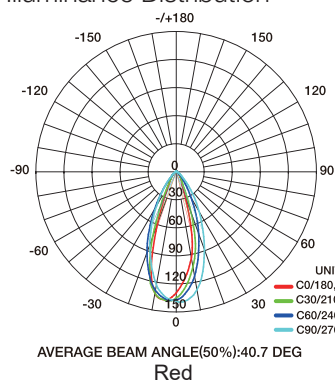


SFW20 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)

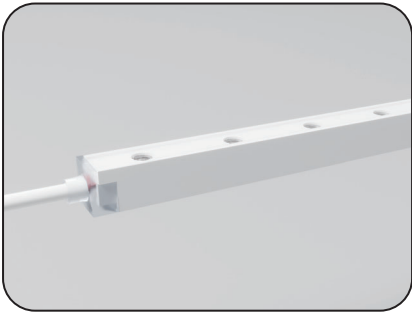



Direct Entry Connector

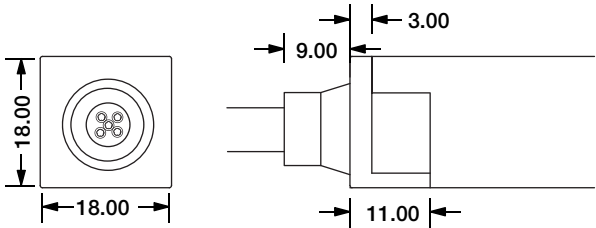


Bottom Entry Connector

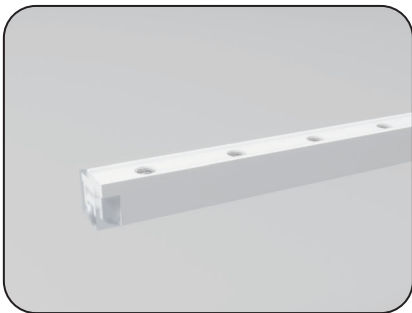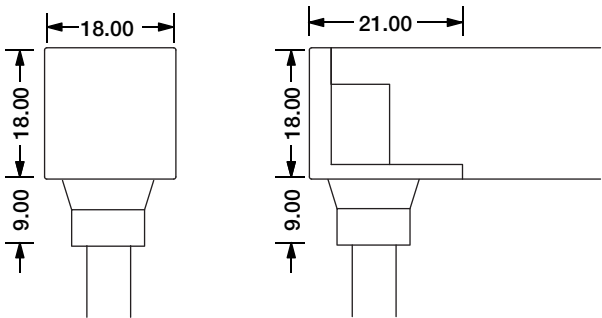


End Cap

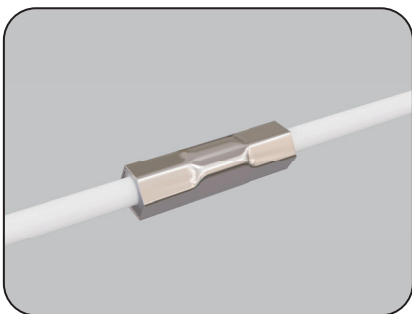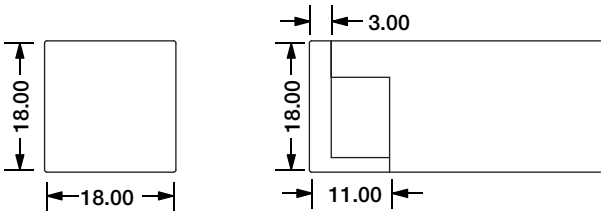


Waterproof Interrupter

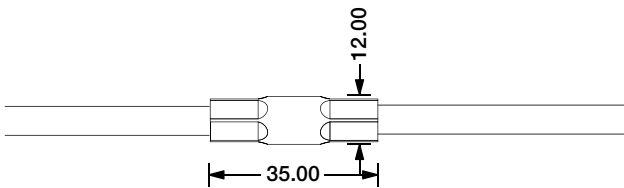



Male Connector

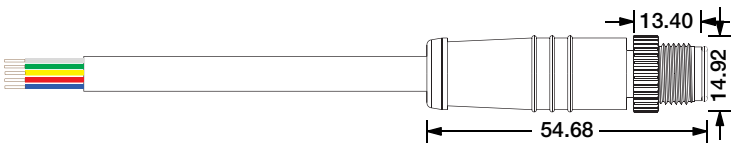



SFW20 Configuration and Accessories

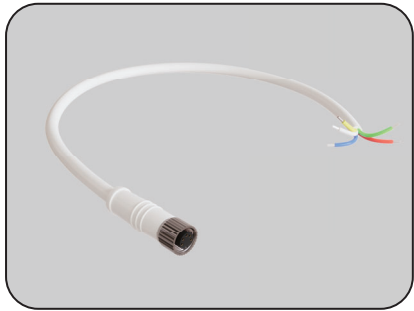



Female Connector

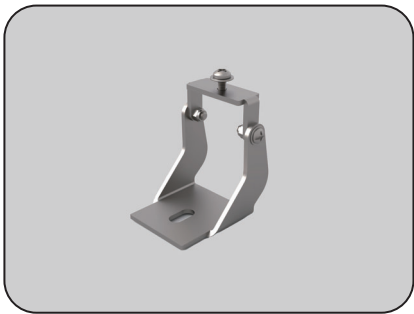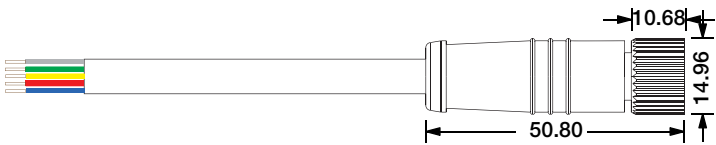



Angle Adjustable Bracket

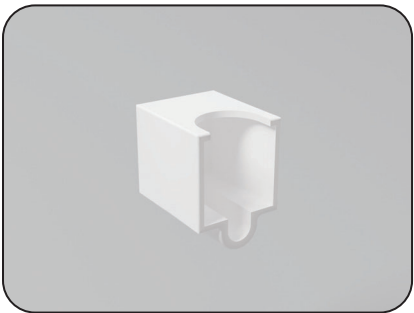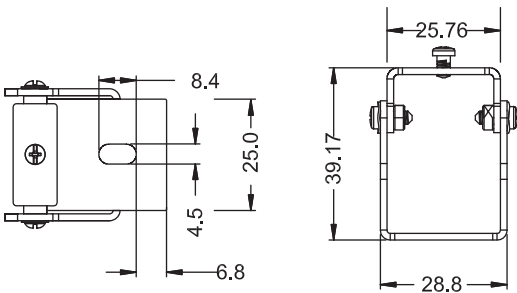


DIY Front Connector Accessories

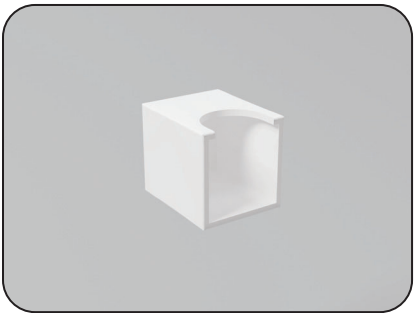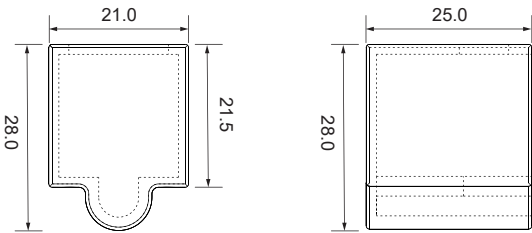

DIY End Connector Accessories

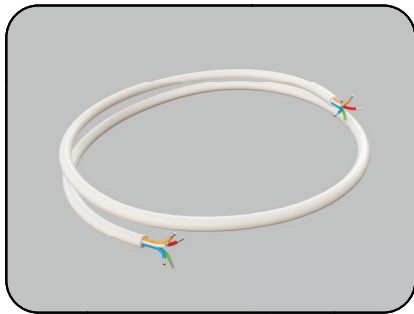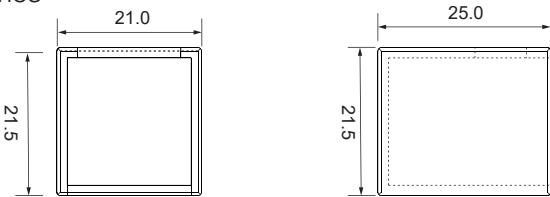


DIY Connected Cable



SFW20 LED Wall Grazer Mounting Channel



Male Connector End Cap



Female Connector End Cap

