



SF24 Mono Color 360° Emitting Silicone LED Linear Flex

SF24-24V-2835-288-U2-2200K~6500K



Specification




Φ24mm
Dimension

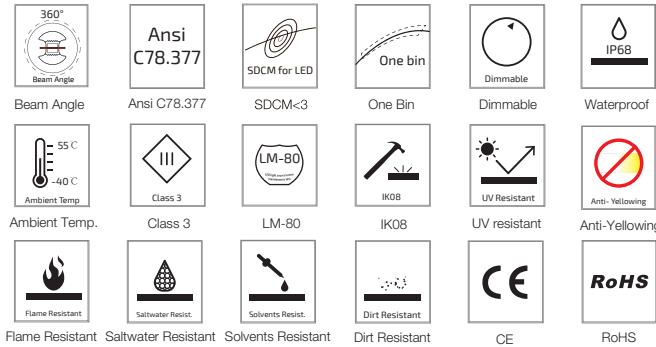


Technical Parameters

Electrical		Optional Color		Lumen Output
Input Voltage	24V DC		2200K(2238±102K)	1300lm/m
Power Consumption	16W/m		2500K(2460±120K)	1320lm/m
Physical			2700K(2725±145K)	1350lm/m
LED Count	288 LEDs/m		3000K(3045±175K)	1380lm/m
Cutting Unit	4 LEDs		3500K(3465±245K)	1400lm/m
Cutting Unit Length	16.67 mm		4000K(3985±275K)	1420lm/m
Minimum Bend Diameter	120mm		4500K(4503±243K)	1440lm/m
Output			5000K(5209±283K)	1460lm/m
LED Light	Epistar SMD LED 2835		5700K(5667±355K)	1470lm/m
CRI	>80, >90		6500K(6532±510K)	1480lm/m
Max Run Length*			Blue (455-465nm)	280lm/m
Single Feed	10 M		Lemon Yellow (570-580nm)	1030lm/m
Double Feed	20 M		Pink (610-620nm)	600lm/m
Beam Angle	360°			
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C			
Temperature Ranges				
Installation	0°C to 50°C			
Operating	-40°C to 55°C			
Dependability				
IP Rating	IP68			

Illuminance Distribution




White Color Charts

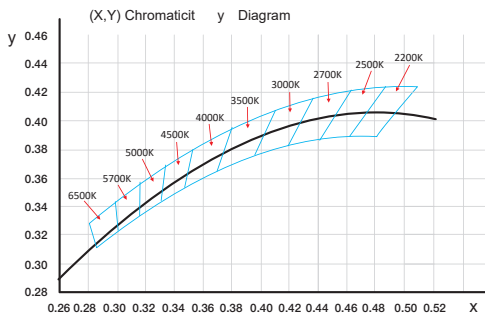


SF24 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)

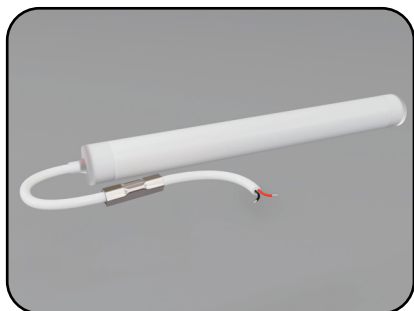


Direct Entry Connector

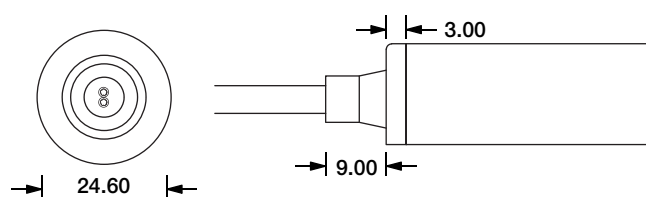


Side Entry Connector

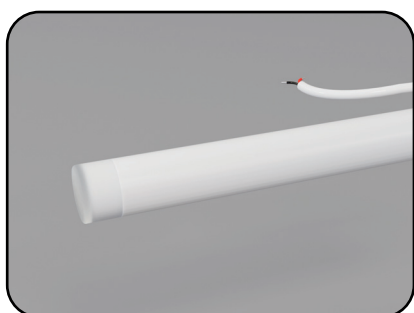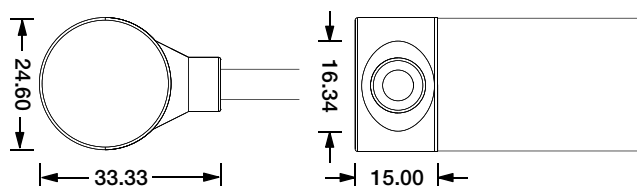


End Cap

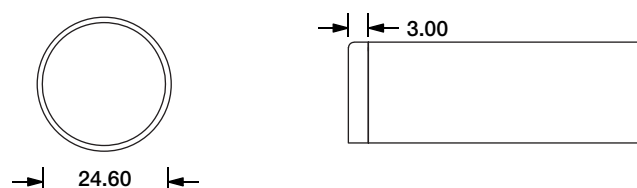


DIY Snap Front Connector

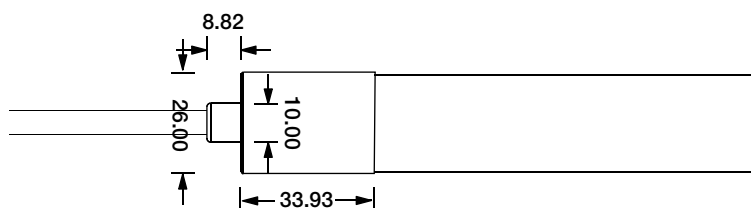


DIY End Cap Connector

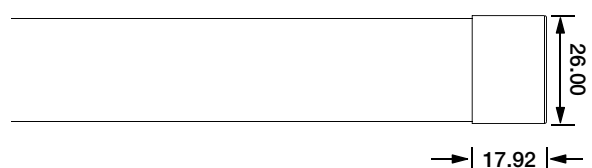



SF24 Configuration and Accessories

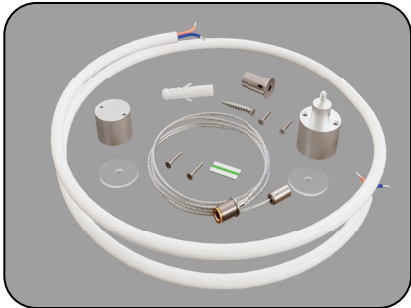



DIY Pendant Accessories Connector Kit

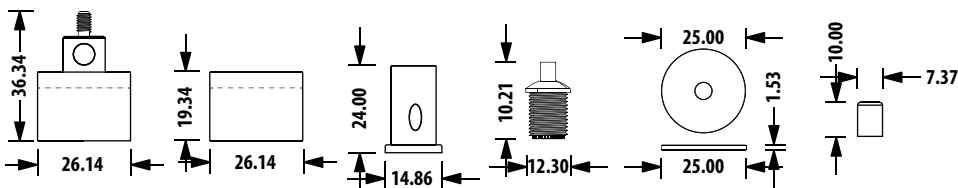



DIY Pendant Accessories Connector Kit

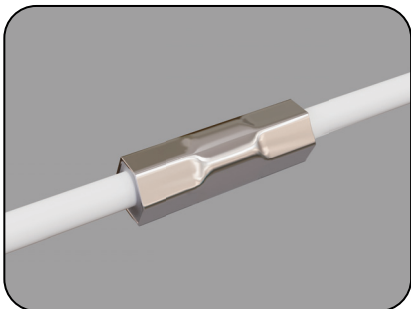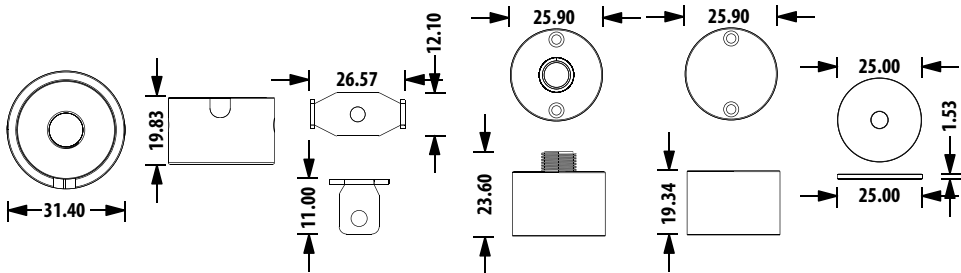


Waterproof Interrupter

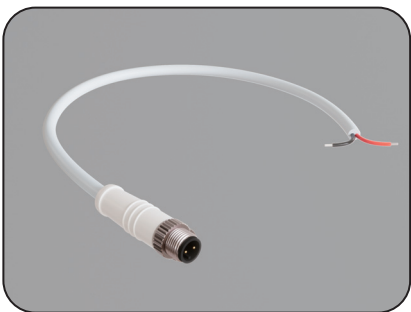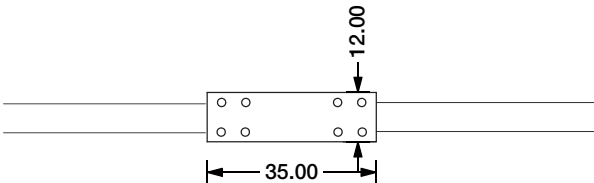

Male Connector

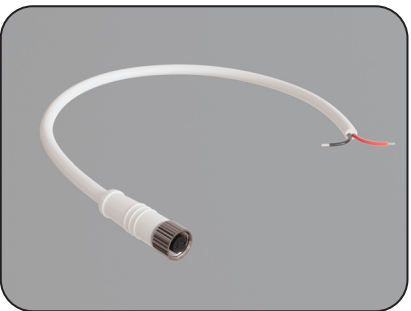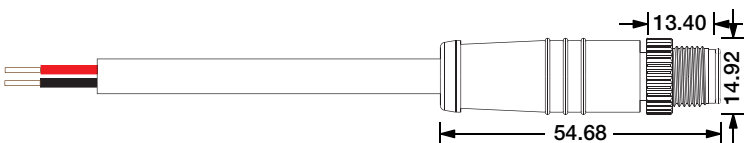



Female Connector

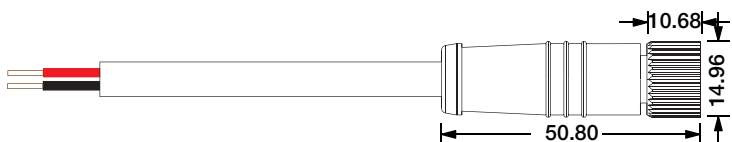



SF24 Configuration and Accessories





Pendant Accessories

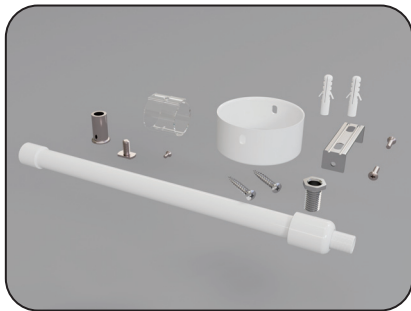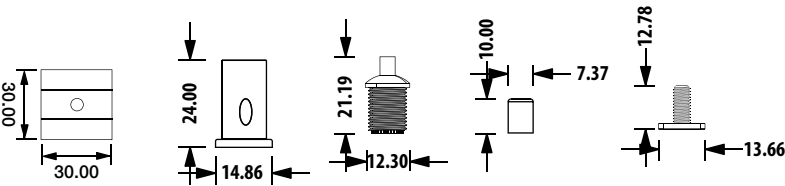



Metal base Mounting Accessories Kit

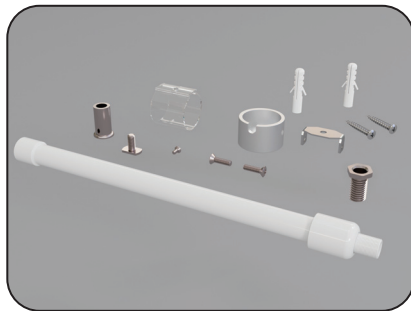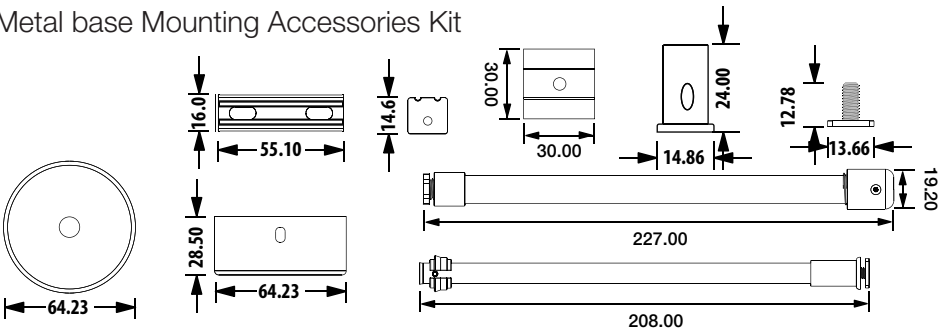


Aluminum alloy base Mounting Accessories Kit

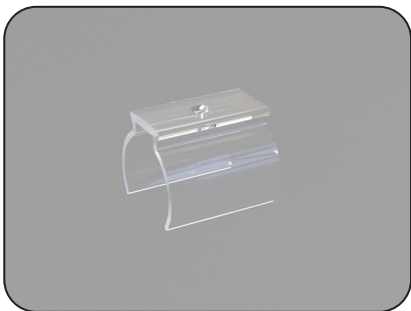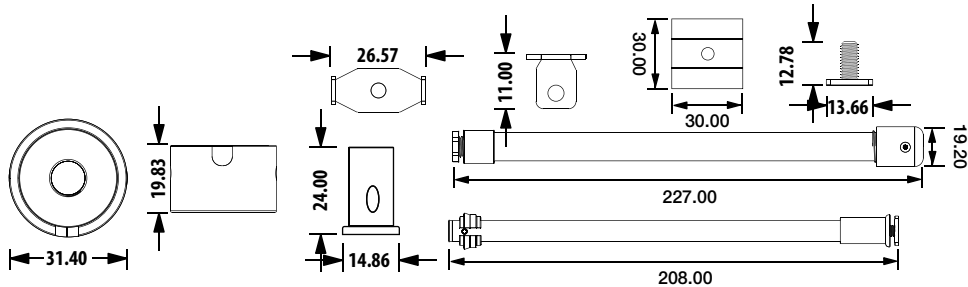


Mounting Plastic Clips

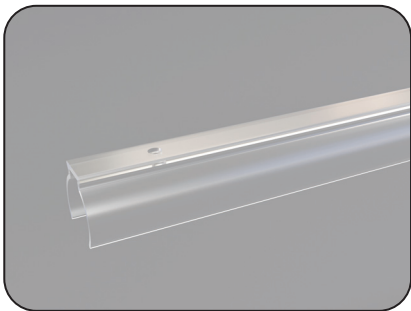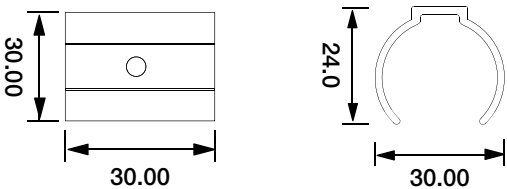

Mounting Plastic Channel

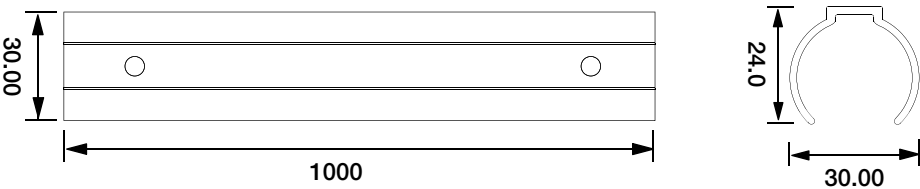

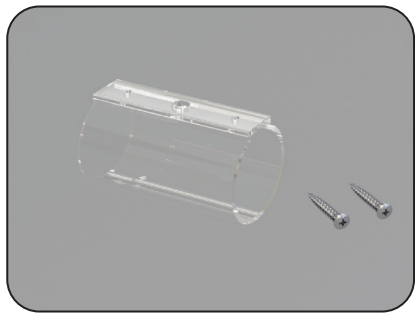

Mounting Connective Plastic Clips

